


PPAC series / PPAC-XXAS series



PPAC-25AS / PPAC-25ASG

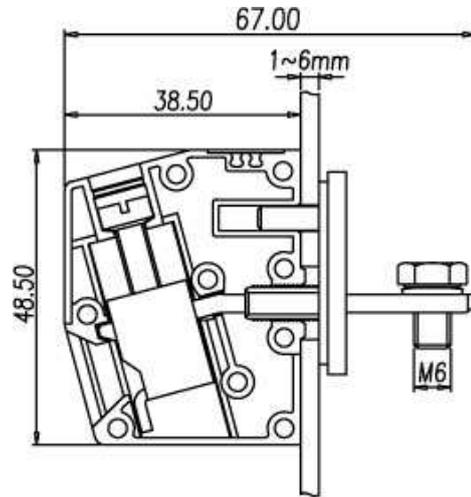

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V	500V
Rated current	100A	125A
Conductor cross-section, solid (AWG / mm ²)	8~3 / 6~35	
Conductor cross-section, flexible (AWG / mm ²)	8~3 / 6~25	
Rated impulse withstand voltage	6KV	
Torque (N-m)	3.38	
Screw	M5	
Wire strip length	19mm	
Insulating material	PA	
Outer dimension TxHxW (mm)	15.1 x 48.5 x 38.5	
Inner dimension TxHxW (mm)	15.1 x 33.3 x 27.5	

	Accessories	Cat. No.
Marking label		TM28
Tool		



Dimension

