


PPAC series / PPAC-XXAS series



PPAC-50AS / PPAC-50ASG

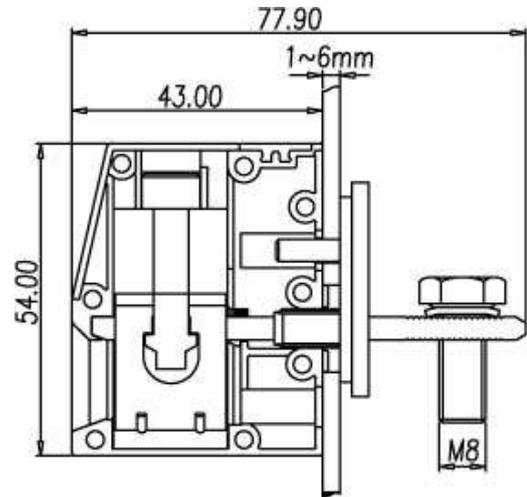

Approval	UL	
Technical Data	UL	IEC
Rated voltage	300V	690V
Rated current	150A	150A
Conductor cross-section, solid (AWG / mm ²)	6~1/0 / 16~50	
Conductor cross-section, flexible (AWG / mm ²)	6~1/0 / 16~50	
Rated impulse withstand voltage	8KV	
Torque (N-m)	5.9	
Screw	M6	
Wire strip length	24mm	
Insulating material	PA	
Outer dimension TxHxW (mm)	18.8 x 54 x 43	
Inner dimension TxHxW (mm)	18.8 x 37 x 33.9	

	Accessories	Cat. No.
Marking label		TM28
Tool		

Dimension

