


**PPAC series / PPAC-XXAS series**



**PPAC-95MAS / PPAC-95MASG**

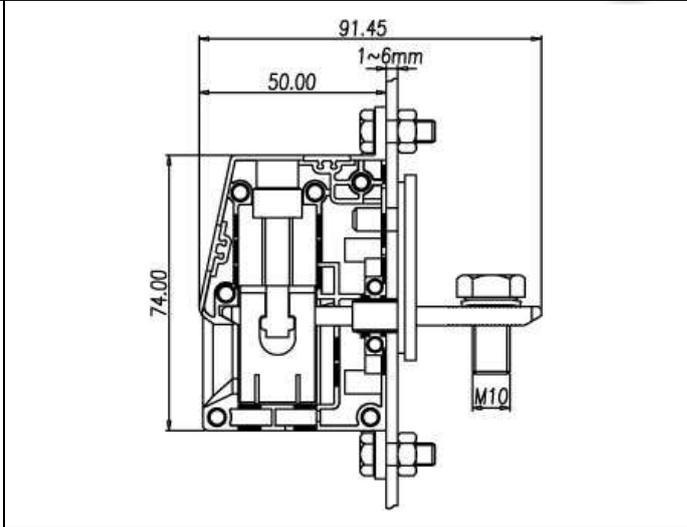

Approval	<b>UL</b>	
Technical Data	UL	IEC
Rated voltage	300V	1000V
Rated current	230A	232A
Conductor cross-section, solid (AWG / mm <sup>2</sup> )	4~4/0 / 25~95	
Conductor cross-section, flexible (AWG / mm <sup>2</sup> )	4~4/0 / 25~95	
Rated impulse withstand voltage	8KV	
Torque (N-m)	14.7	
Screw	M8	
Wire strip length	27mm	
Insulating material	PA	
Outer dimension TxHxW (mm)	25 x 100 x 50	
Inner dimension TxHxW (mm)	25 x 50 x 40.45	

	Accessories	Cat. No.
Marking label		TM28
Tool		



Dimension

