


Specifications

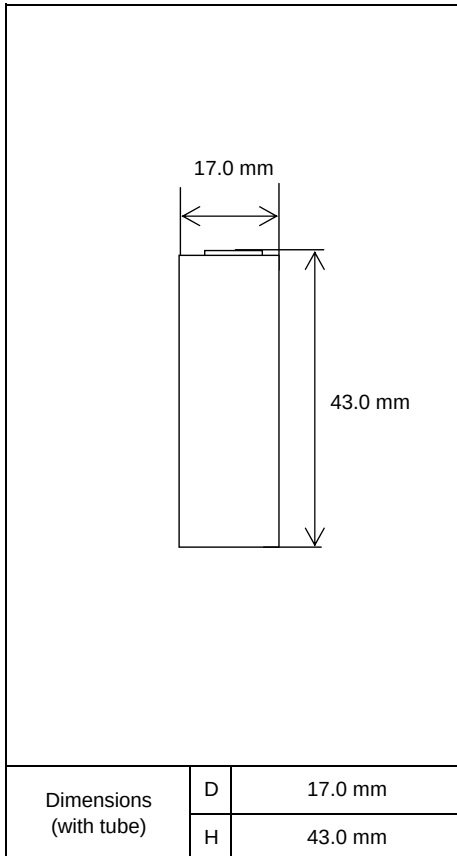


Type : Nickel-Metal Hydride Battery		Size : 4/5A
Capacity ¹⁾	Typical	2150mAh
	Minimum	1950mAh
Nominal Voltage		1.2V
Charging Current x Time	Fast Charge ²⁾	2150 mA x about 1.1h
Ambient Temp.	Charge Condition	Fast Charge ²⁾
	0°C - 40°C	
	Discharge Condition	
	0°C - 50°C	
	Storage Condition	
	Less than 30days	-20°C - 50°C
	Less than 90days	-20°C - 40°C
	Less than 1year	-20°C - 30°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)		Approx. 25mΩ(at 1000Hz)
Weight ⁴⁾		Approx. 35 g
Size ⁴⁾ : (Diameter) x (Height)		17.0(D) x 43.0(H) mm

- 1) Single cell capacity under the following condition.
 Charge : 215mA×16h, Discharge : 430mA(E.V.=1.0V) at 20°C
 2) Use recommended charging system.
 3) After a few charge and discharge cycles under the above 1) condition.
 4) With tube.

Typical Characteristics

Charge

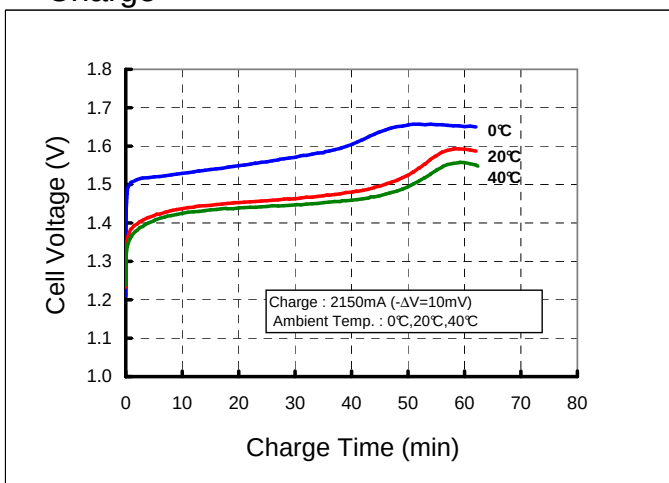

Discharge

