

# FR1601 THRU FR1606



## 16.0 AMP FAST RECOVERY RECTIFIERS



### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

### MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: As Marked
- \* Mounting position: Any
- \* Weight: 2.24 grams

### VOLTAGE RANGE

50 to 800 Volts

### CURRENT

16.0 Amperes

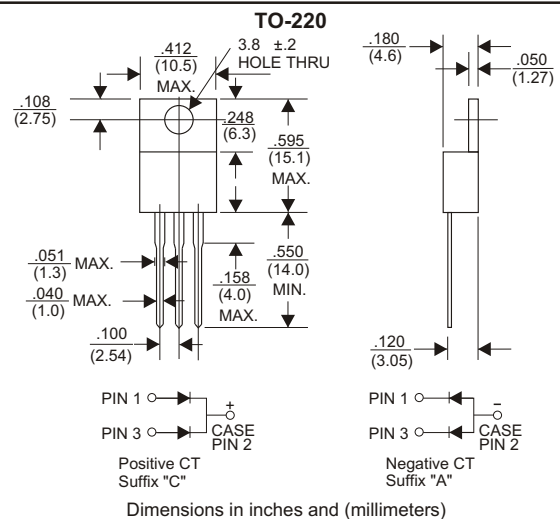

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER   | FR1601     | FR1602 | FR1603 | FR1604 | FR1605 | FR1606 | UNITS |
|---|------------|--------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage  | 50         | 100    | 200    | 400    | 600    | 800    | V     |
| Maximum RMS Voltage   | 35         | 70     | 140    | 280    | 420    | 560    | V     |
| Maximum DC Blocking Voltage   | 50         | 100    | 200    | 400    | 600    | 800    | V     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at T <sub>c</sub> =100°C        | 16.0       |        |        |        |        |        | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 200        |        |        |        |        |        | A     |
| Maximum Instantaneous Forward Voltage at 8.0A   | 1.3        |        |        |        |        |        | V     |
| Maximum DC Reverse Current T <sub>c</sub> =25°C   | 10.0       |        |        |        |        |        | A     |
| at Rated DC Blocking Voltage T <sub>c</sub> =100°C  | 200        |        |        |        |        |        | A     |
| Maximum Reverse Recovery Time (Note 1)  | 150        |        |        | 250    |        | 500    | nS    |
| Typical Junction Capacitance (Note 2)   | 65         |        |        |        |        |        | pF    |
| Operating and Storage Temperature Range T <sub>j</sub> , T <sub>stg</sub>                             | -65 — +150 |        |        |        |        |        | °C    |

#### NOTES:

- Reverse Recovery Time test condition: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A
- Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## RATING AND CHARACTERISTIC CURVES (FR1601 THRU FR1606)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

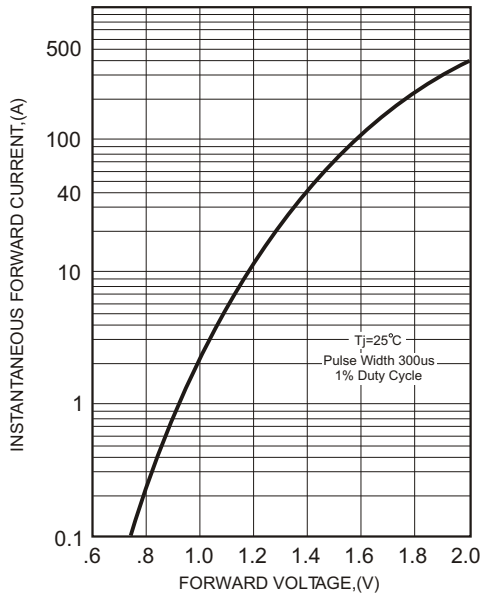


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


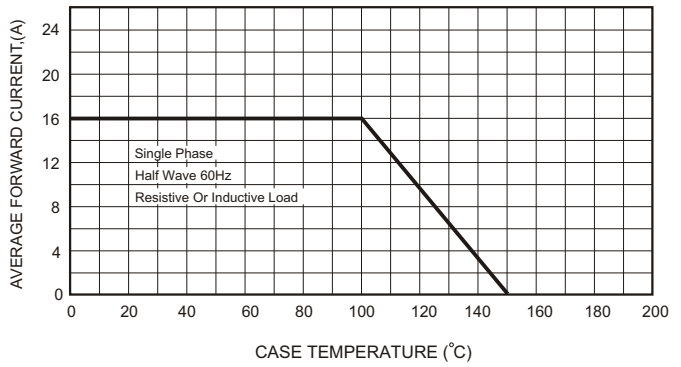


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

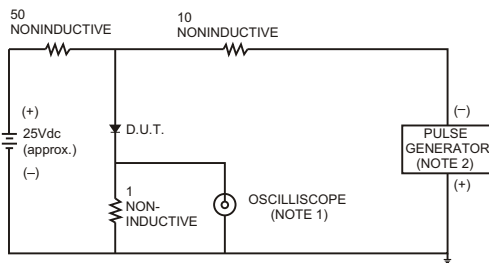

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm, 22pF.  
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

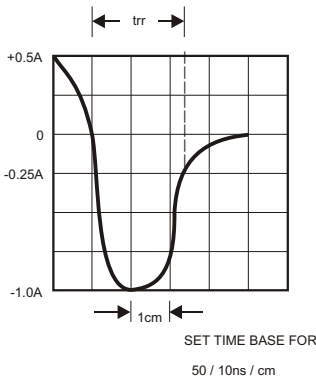


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

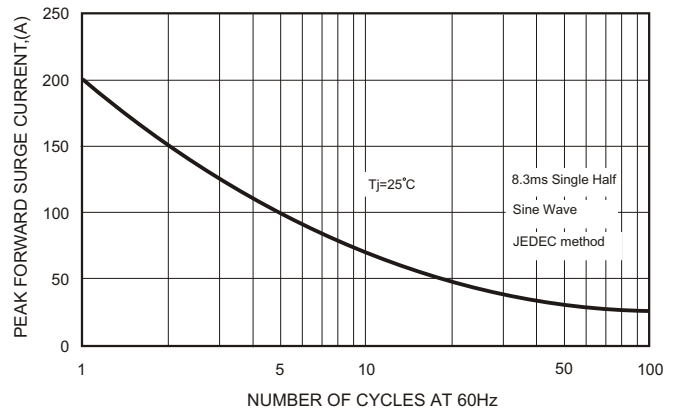


FIG.5-TYPICAL JUNCTION CAPACITANCE

