

DATA SHEET

WIRELESS COMPONENTS

Ceramic Patch Antenna

ANT1515B00FT1575A

GPS

PIN 15 × 15 × 4 mm



FEATURES

- High radiation efficiency
- Pin-solder process
- RoHS compliant

APPLICATIONS

- Navigation device
- Telematics box
- Fleet management

ORDERING INFORMATION

All part numbers are identified by the series, packing type, material, size, antenna type, working frequency and packing quantity.

PART NUMBER

ANT I515 B 00F T I575A
(1) (2) (3) (4) (5) (6)

(1) PRODUCT

ANT = Antenna

(2) SIZE

I515 = 15 × 15 mm

(3) ANTENNA TYPE

B = Bulk Antenna

(4) SERIAL NO.

00F

(5) PACKING STYLE

T = Tray

(6) WORKING FREQUENCY

I575 = 1.575 GHz

PHYCOMP CTC

CAN43134230F1581B

I2NC

43134230F158

SPECIFICATION

Table 1

DESCRIPTION	VALUE
Centre Frequency	1580 ± 2MHz
Bandwidth	8 MHz (Typ.)
Gain	1.5 dBic (Typ.)
VSWR	2.0 Max.
Polarization	Right Hand Circular Polarization
Axis Ratio	≤ 3 dB
Beam Width	> 120 degrees
Impedance	50Ω
Operating Temperature	-40~105 °C

NOTE

1. Based on 40×40 mm² square ground plane.
2. Centre frequency will be offset to working frequency while changes of customer's housing and ground plane.
3. Please contact local sales if you need customized design to gain optimum antenna performance.


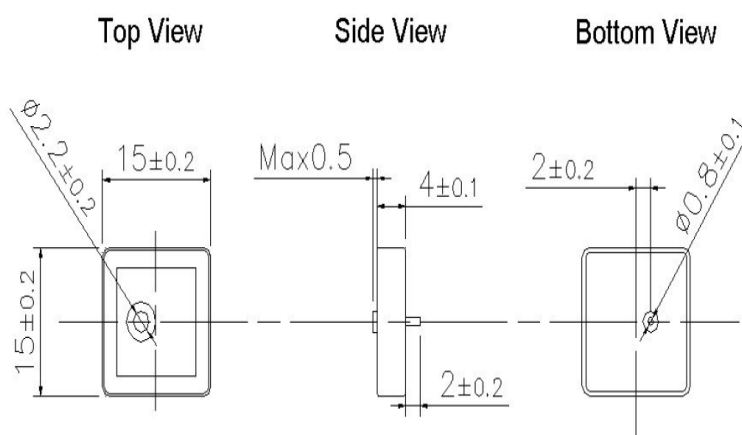


Fig. 1 Mechanical Data

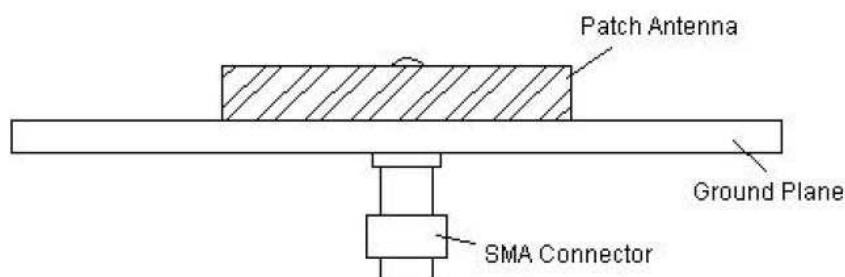

Ground Plane Size: 40*40 mm²

Fig. 2 Evaluation Board

ELECTRICAL PERFORMANCES

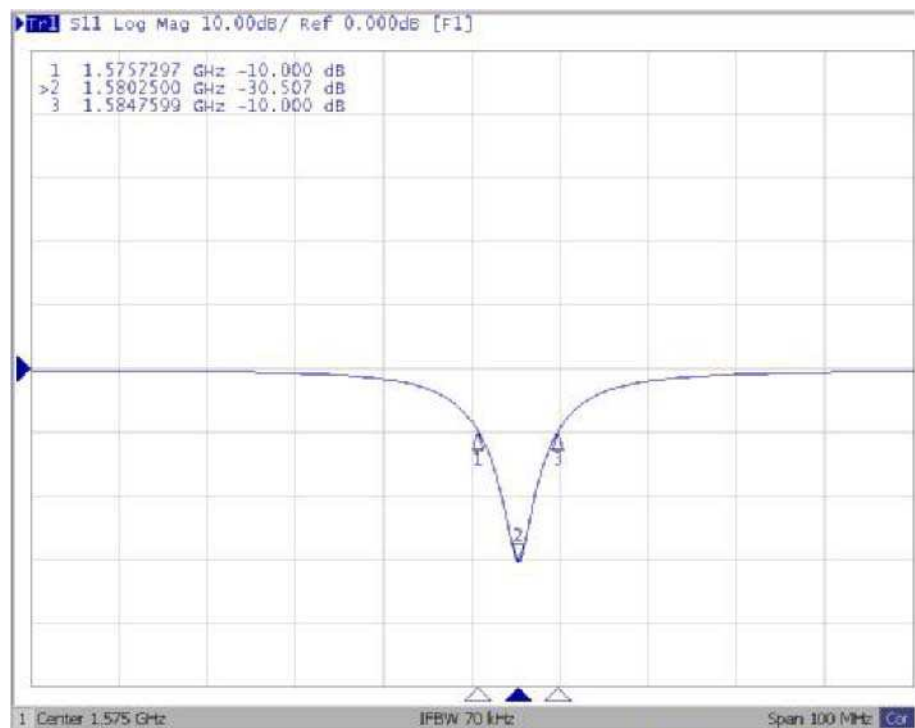


Fig. 3 Return loss

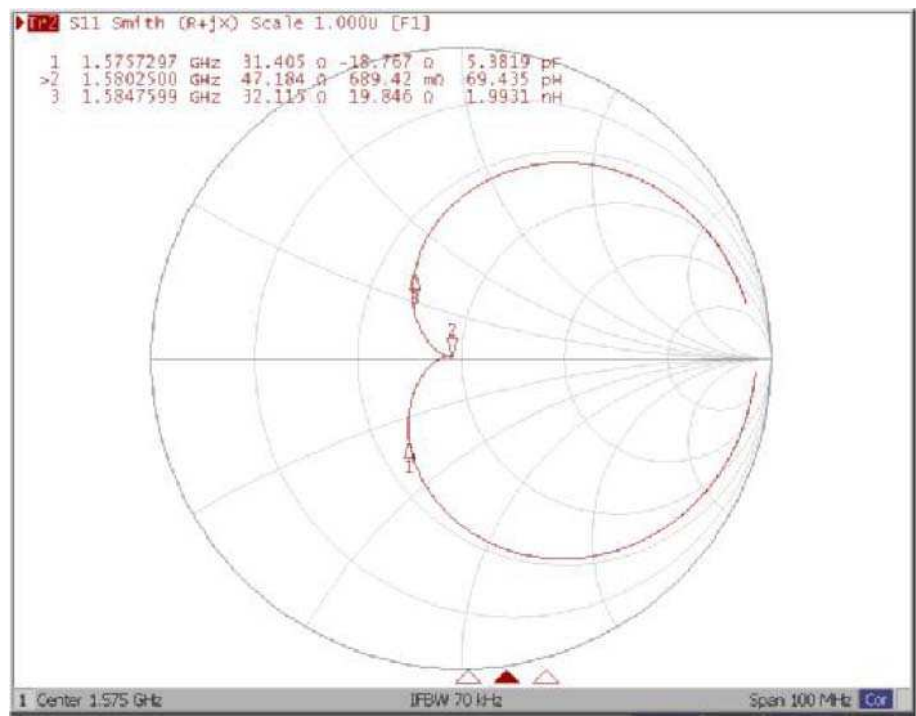


Fig. 4 Smith Chart

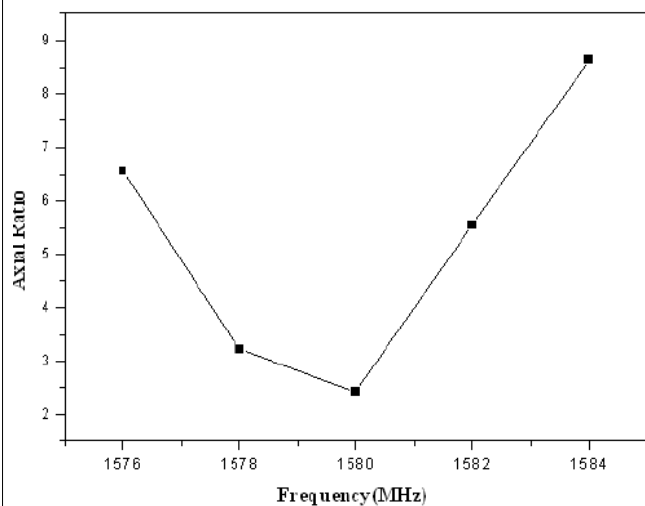


Fig. 5 Axial Ratio measurement

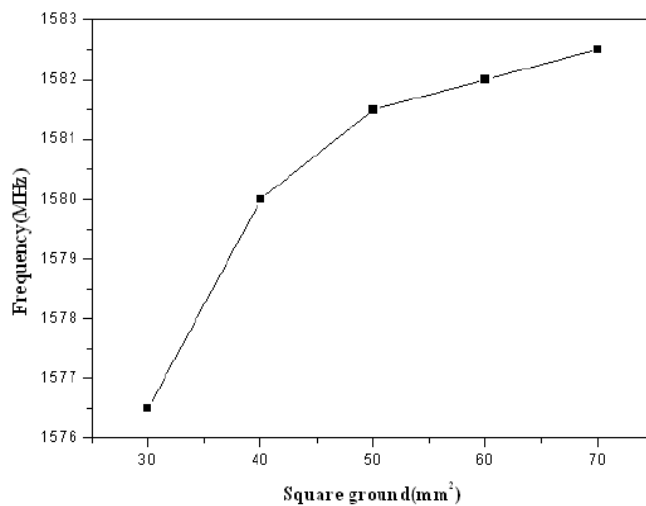


Fig. 6 Center Frequency V.S. Ground Plane

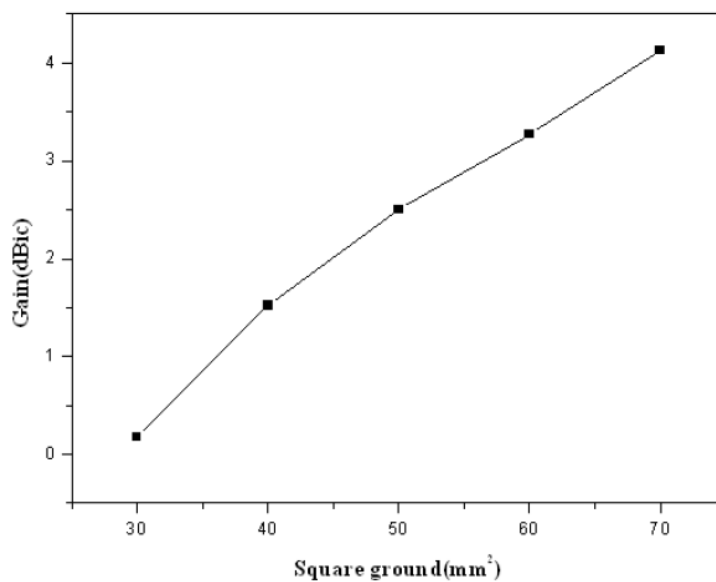
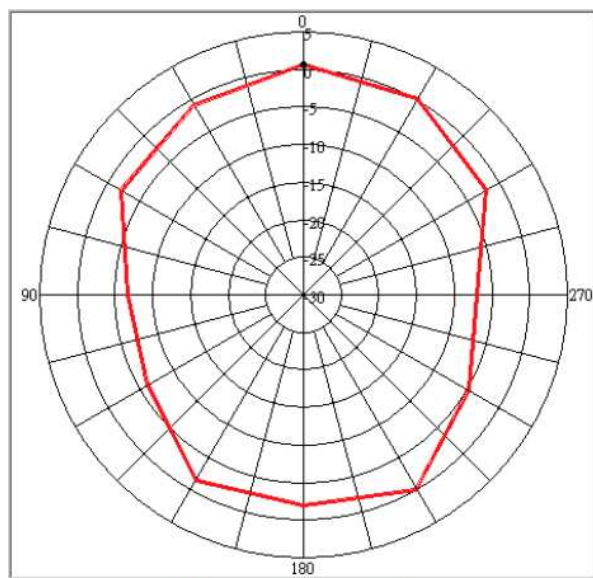
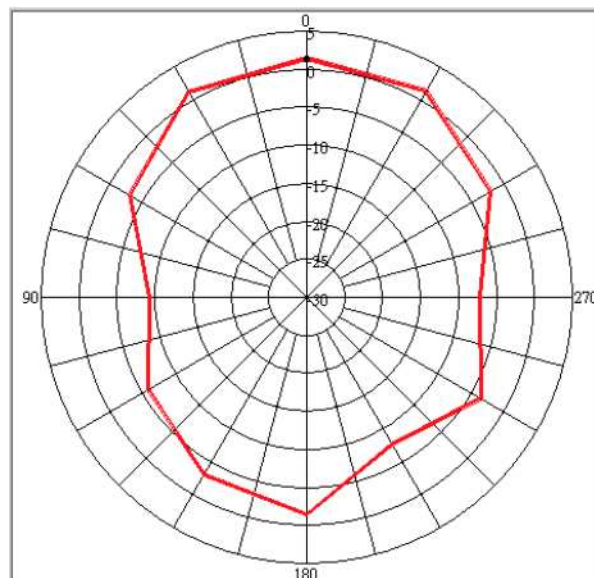
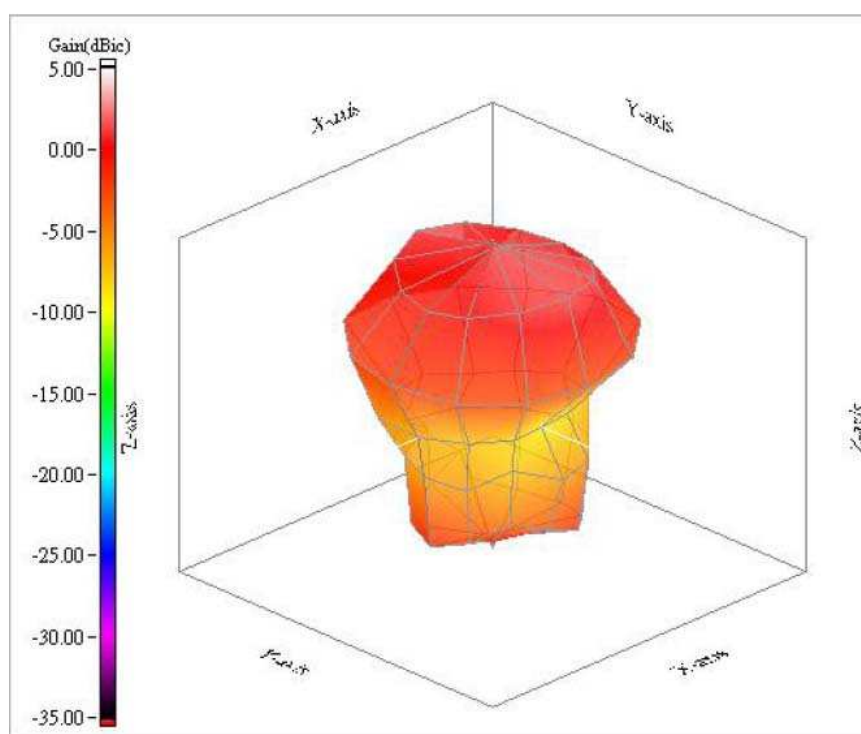


Fig. 7 Antenna Gain V.S. Ground Plane

**2D x-z plane pattern****2D y-z plane pattern****3D radiation pattern****Fig. 8 Radiation Pattern (Frequency = 1580MHz)**

REVISION HISTORY

REVISION	DATE	CHANGE NOTIFICATION	DESCRIPTION
Version 0	Feb 08, 2013	-	- New data sheet for Patch antenna, PIN Feed size 15×15×4 mm