


## GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE - 600Volts  
FORWARD CURRENT - 15.0 Amperes

### FEATURES

- Surge overload rating -240 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L flammability classification 94V-0
- Mounting position:Any

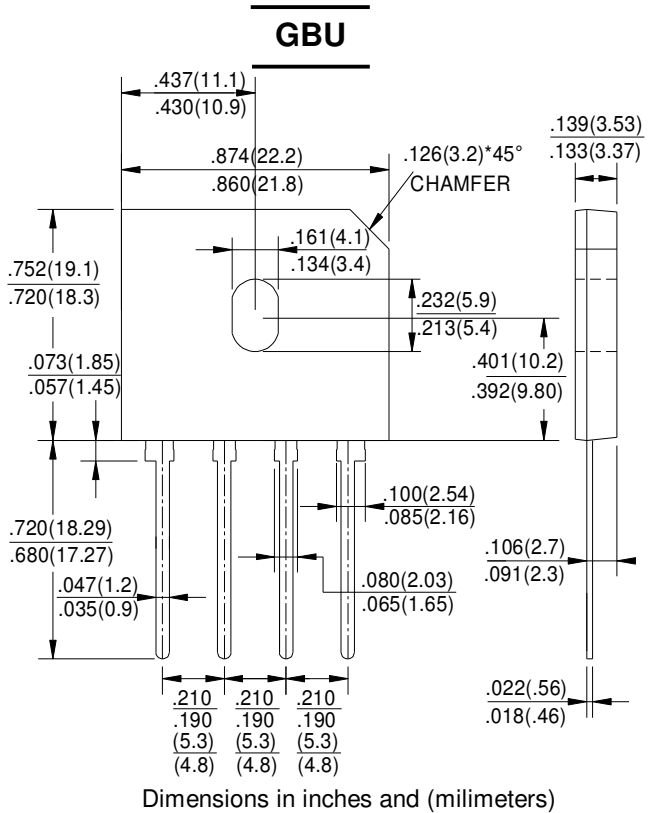

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| CHARACTERISTICS  | SYMBOL            | GBU1506F    | UNIT             |
|--|-------------------|-------------|------------------|
| Maximum Recurrent Peak Reverse Voltage   | V <sub>RRM</sub>  | 600         | V                |
| Maximum RMS Voltage  | V <sub>RMS</sub>  | 420         | V                |
| Maximum DC Blocking Voltage  | V <sub>DC</sub>   | 600         | V                |
| Maximum Average Forward (with heatsink Note 2)<br>Rectified Current @ T <sub>C</sub> =100°C (without heatsink) | I <sub>(AV)</sub> | 15.0<br>3.2 | A                |
| Peak Forward Surge Current<br>8.3ms Single Half Sine-Wave<br>Super Imposed on Rated Load (JEDEC Method)        | I <sub>FSM</sub>  | 240         | A                |
| Maximum Forward Voltage at 7.5A DC   | V <sub>F</sub>    | 0.95        | V                |
| Maximum DC Reverse Current @ T <sub>J</sub> =25°C<br>at Rated DC Blocking Voltage @ T <sub>J</sub> =125°C      | I <sub>R</sub>    | 10.0<br>500 | μA               |
| I <sup>2</sup> t Rating for Fusing (t<8.3ms)   | I <sup>2</sup> t  | 200         | A <sup>2</sup> s |
| Typical Junction Capacitance Per Element (Note1)   | C <sub>J</sub>    | 70          | pF               |
| Operating Temperature Range  | T <sub>J</sub>    | -55 to +150 | °C               |
| Storage Temperature Range  | T <sub>STG</sub>  | -55 to +150 | °C               |

NOTES: 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2.Device mounted on 100mm\*100mm\*1.6mm Cu plate heatsink.

FIG.1-MAXIMUM FORWARD SURGE CURRENT

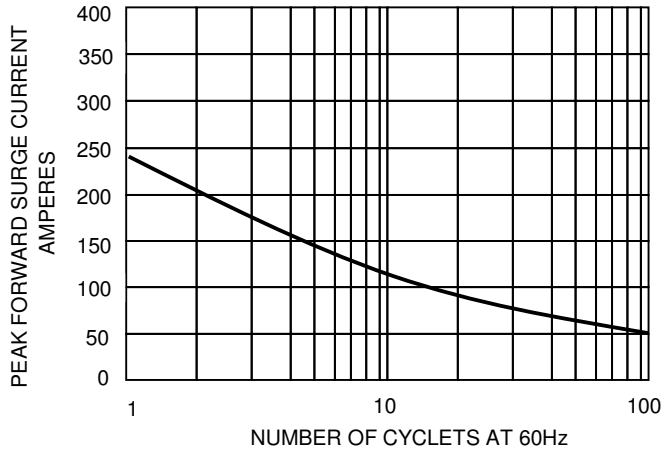


FIG.2- DERATING CURVE  
 OUTPUT RECTIFIED CURRENT

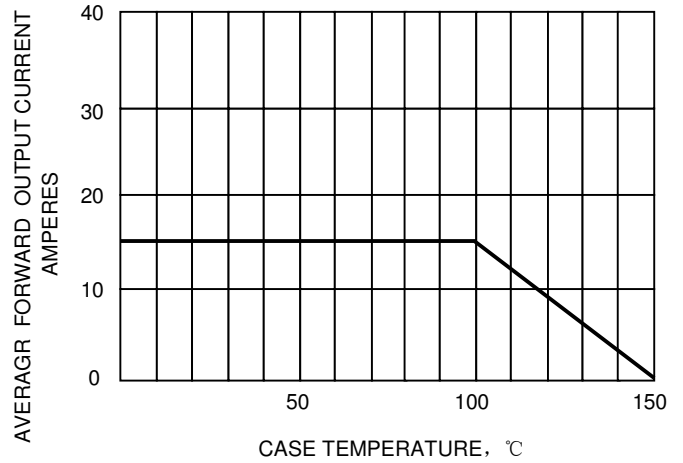


FIG.3-TYPICAL FORWARD  
 CHARACTERISTICS

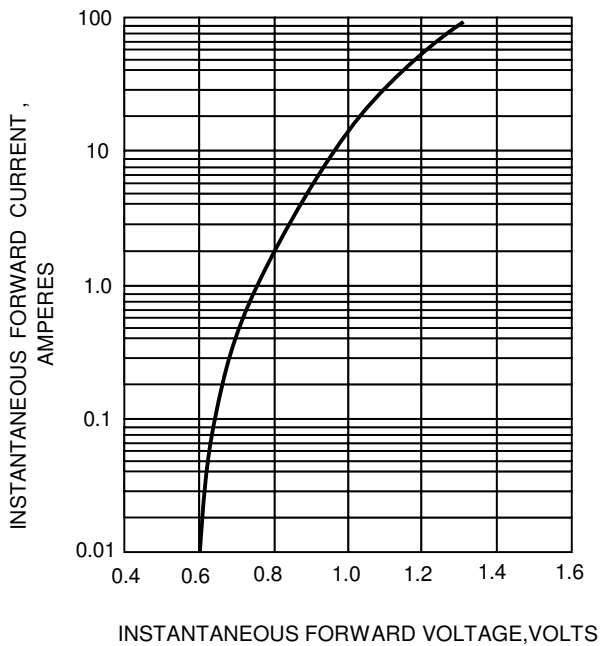


FIG.4-TYPICAL REVERSE  
 CHARACTERISTICS

