

SUPER FAST RECTIFIERS


REVERSE VOLTAGE - 50 to 600 Volts
FORWARD CURRENT - 6.0 Amperes

FEATURES

- Super fast switching time for high efficiency
- Low forward voltage drop
High current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Case: JEDEC R-6 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.07 ounces , 2.1 grams
- Mounting position: Any

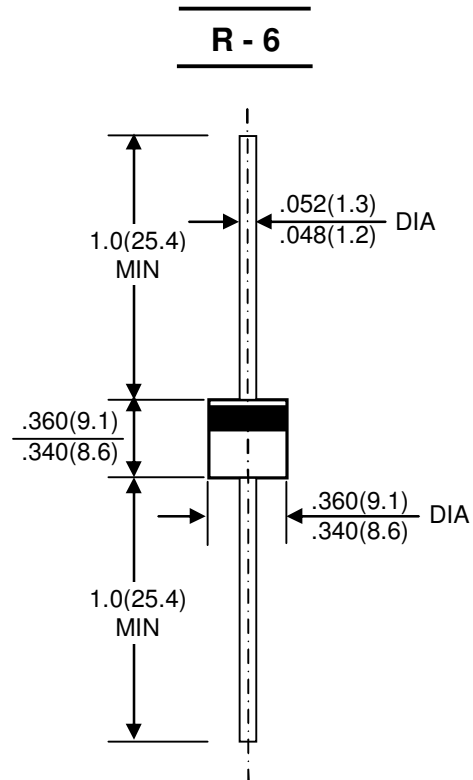

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SF61	SF62	SF63	SF64	SF65	SF66	SF68	UNIT	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	600	V	
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	420	V	
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	600	V	
Maximum Average Forward Rectified Current @TA =55 °C	I(AV)	6.0							A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	150							A	
Peak Forward Voltage at 4.0A DC	VF	0.975			1.3		1.7		V	
Maximum DC Reverse Current @TJ=25°C at Rated DC Bolcking Voltage @TJ=100°C	IR	10				100				µA
Maximum Reverse Recovery Time(Note 1)	TRR	35							nS	
Typical Junction Capacitance (Note2)	CJ	100				85				pF
Typical Thermal Resistance (Note3)	RθJA	5							°C/W	
Operating Temperature Range	TJ	-55 to +150							°C	
Storage Temperature Range	TSTG	-55 to +150							°C	

NOTES: 1.Measured with IF=0.5A,IR=1A,IRR=0.25A.

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3.Thermal resistance junction to ambient

FIG. 1 – FORWARD CURRENT DERATING CURVE

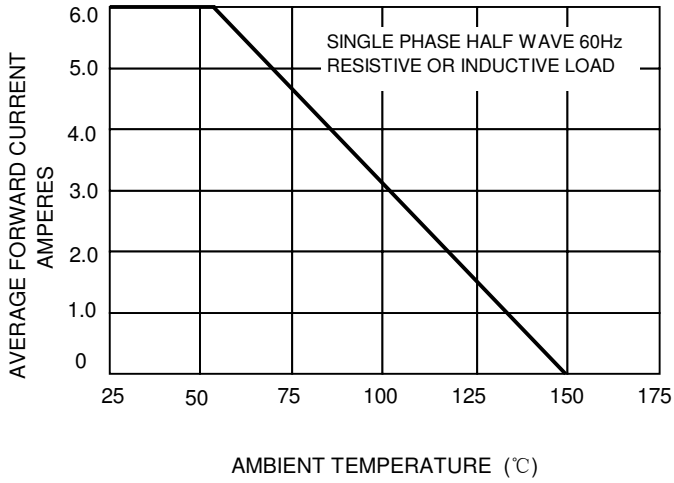


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

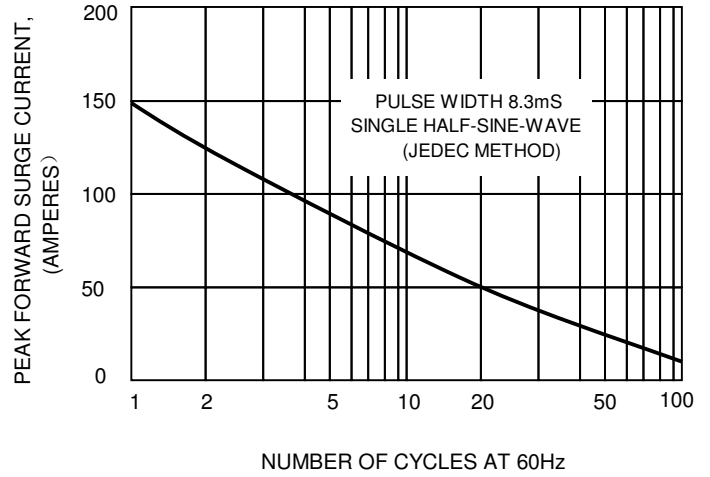


FIG.3 – TYPICAL JUNCTION CAPACITANCE

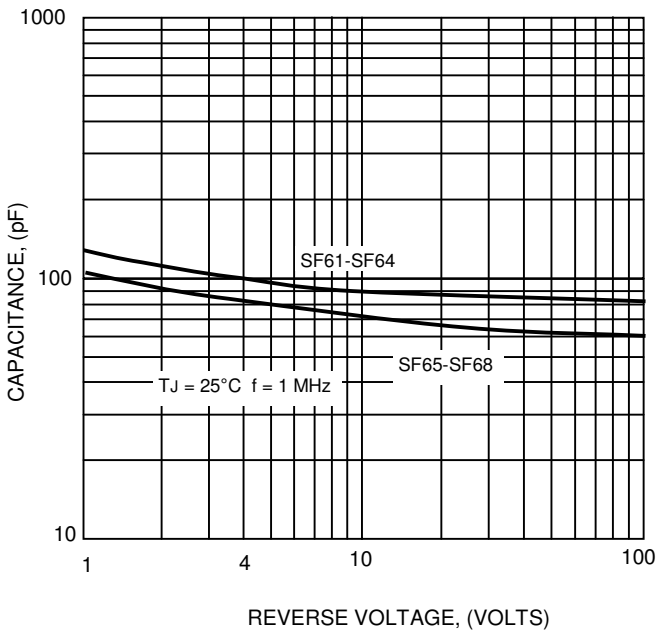


FIG.4-TYPICAL FORWARD CHARACTERISTICS

