


FAST RECOVERY EPITAXIAL DIODE	600V / 30A $V_F=2.2V @ I_F=30A, t_{rr}=52ns$
--------------------------------------	---

- PRODUCT FEATURES**
- Ultrafast Recovery Time
 - Soft Recovery Characteristics
 - Low Recovery Loss
 - Low Forward Voltage
 - High Surge Current Capability
 - Low Leakage Current
- APPLICATIONS**
- Converter, PFC
 - Freewheeling, Snubber
 - UPS, Plating Power Supply
 - Inversion Welder
- MECHANICAL DATA**
- Case : TO-220AC Molded Plastic
 - Epoxy : UL94V-0 rate flame retardant
 - Polarity : As Marked

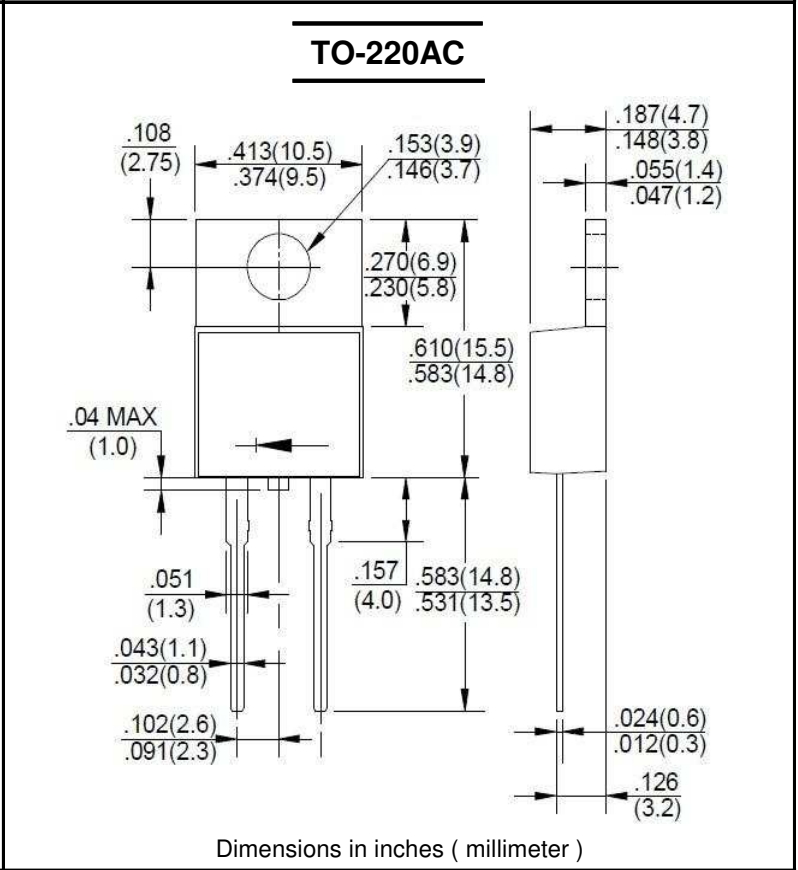

ABSOLUTE MAXIMUM RATINGS (TC=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUES	UNIT
	Marking	D30A06T	
Maximum Repetitive Reverse Voltage	V_{RM}	600	V
Average Forward Current	$I_{F(AV)}$	30	A
Non-Repetitive Surge Forward Current	I_{FSM}	150	A
Power Dissipation	P_D	62.5	W
Operating Junction and Storage Temperatures	T_J, T_{STG}	-55 to + 150	°C
Thermal Resistance	Junction-to-Case	$R_{\theta JC}$	2.0 °C/w
Module-to-Sink		1.1	Nt.m
Weight		2.1	g

ELECTRICAL AND DYNAMIC RECOVERY CHARACTERISTICS (T_J=25°C, unless otherwise specified)

PARAMETER	TEST CONDITIONS	SYMBOL	Min.	Typ.	Max.	UNIT
Reverse Leakage Current	$V_R=600V$	I_{RM}	-	-	25	μA
	$V_R=600V, T_J=125°C$		-	-	250	μA
Forward Voltage	$I_F=30A$	V_F	-	1.6	2.2	V
	$I_F=30A, T_J=125°C$		-	-	2	V
Reverse Recovery Time	$I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$	t_{rr}	-	35	-	ns
Reverse Recovery Time	$V_R=300V, I_F=30A$	t_r	-	52	-	ns
Max. Reverse Recovery Current	$di_F/dt=-200A/\mu s, T_J=25°C$	I_{RRM}	-	3.8	-	A
Reverse Recovery Time	$V_R=300V, I_F=30A$	t_{rr}	-	135	-	ns
Max. Reverse Recovery Current	$di_F/dt=-200A/\mu s, T_J=125°C$	I_{RRM}	-	8.8	-	A

FIG. 1 - Typical Forward Voltage Drop Characteristics

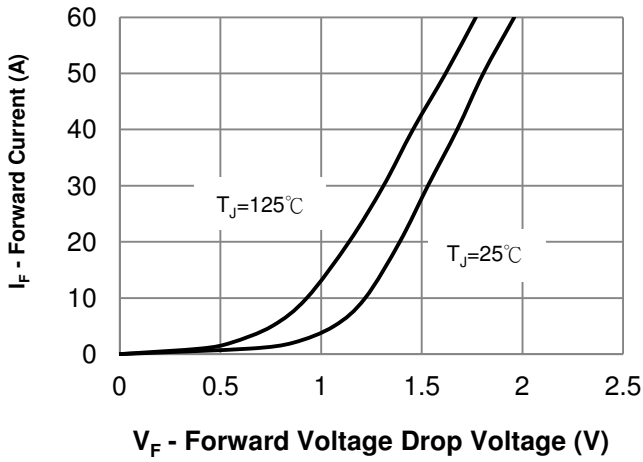


FIG. 2 - Typical Value of Reverse Current vs. Reverse Voltage

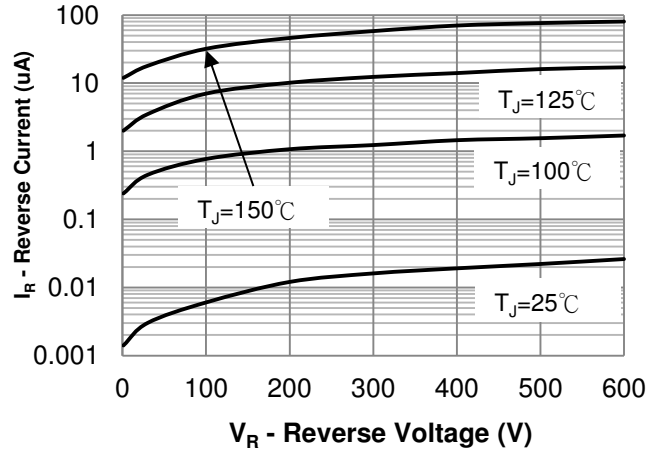


FIG. 3 - Typical Junction Capacitance vs. Reverse Voltage

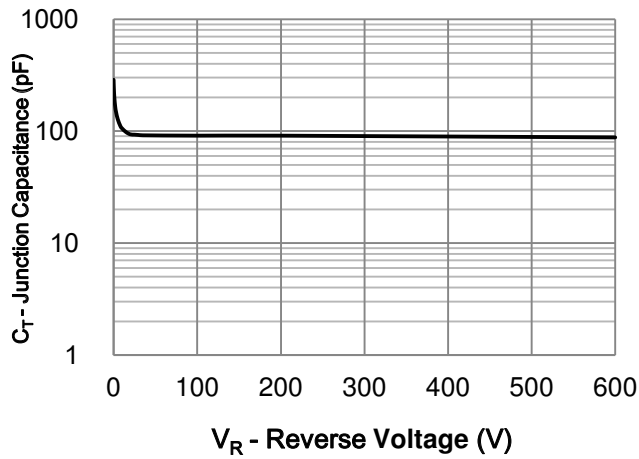


FIG. 4 - Average Forward Current vs. Maximum Allowable Case Temperature

