

USR802972B-OEM


56K* OEM CONTROLLER PCI FAXMODEM

ANALOG

The USRobotics 56K* OEM Controller PCI Faxmodem combines superior performance and reliability with the advantages of V.92 technology. Quick Connect reduces your connection time to get you online quicker, and V.PCM Upstream provides 50% greater upload speeds — perfect for sending e-mail messages with large attachments. Supports Call Notification for screening incoming voice calls while online, and Modem on Hold to answer calls without losing the Internet connection — no second phone line is needed!†

USRobotics®

A Division of UNICOM® Global

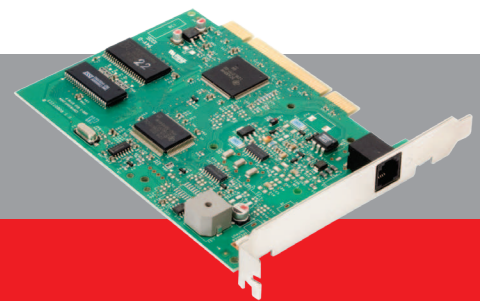

Simple, fast, and affordable online access.

Advanced features and functionality

- Send and receive faxes through your computer while running other applications
- Supports group faxing and timed faxing
- Permanently store preferred modem default settings

Powerful Management Tools

- Call Notification lets you screen incoming calls so you can take the important ones†
- Modem on Hold lets you take calls while online without dropping your Internet connection — there's no need for a second phone line

Get the speed you need

- Quick Connect reduces the time it takes to establish your dial-up Internet connection
- Need to send digital pictures or a large presentation? V.92 lets you send attachments up to 50% faster!

Software upgradable

- Firmware upgradability and downloadable software ensure that this modem will continue to meet your changing needs


Designed for Windows and Linux

- Windows and Linux compatibility mean support for a wide range of business applications

PC manufacturers


- Designed and manufactured specifically for personal computer manufacturers
- Supplied in 50-unit bulk packs; drivers available for download from the USRobotics web site



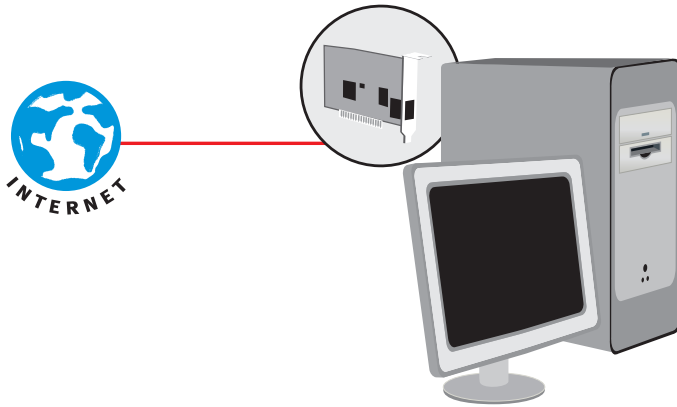

PC with 56K* OEM Controller PCI Faxmodem

USR802972B-OEM 56K* OEM CONTROLLER PCI FAXMODEM



SPECIFICATIONS & STANDARDS

GENERAL

- V.92, V.90, V.34, V.32bis, V.32, V.22bis, V.22, V.23, and V.21
- V.42/MNP 2-4 error correction, V.42 bis/MNP 5 compression
- V.80 video conferencing support
- Fax: EIA 578 (Class 1) and EIA 592 (Class 2.0) with V.17, V.29, V.27ter ITU recommendations
- Hayes Compatible

ENVIRONMENTAL

- **Temperature:**
 - Operating Temperature conditions: 0 to 50 degrees C
 - Non-Operating Temperature conditions: -20 to 70 degrees C
- **Humidity:**
 - Operating Humidity conditions: 20% to 80% non-condensing
 - Non-Operating Humidity conditions: 5% to 95% non-condensing

REGULATORY APPROVALS

- FCC (Part 15)
- FCC (Part 68)
- UL60950-1 and CUL
- ICES-003
- CS-03
- CE mark

MINIMUM SYSTEM REQUIREMENTS

- PC with 486DX or Pentium class processor or equivalent
- Available PCI slot
- Analog phone line
- Linux (Kernel 2.3 and higher), Microsoft Windows 95/98/Me/NT4.0/2000/XP/XP 64 bit/2003/2003 64 bit/Vista/Vista 64 bit/Win 7/Win 7 64 bit/Server 2011/Win 8/Win 8 64 bit/Server 2012 operating system
- 32 MB RAM recommended (64 MB under Windows 2000; 128 MB under Windows XP)
- CD-ROM drive

PACKAGE CONTENTS

- Fifty (50) USRobotics 56K* OEM Controller PCI Faxmodems
- Fifty (50) RJ-11 phone cords (7 ft)
- Fifty (50) Line Filters

WARRANTY

- 2-year limited manufacturer warranty from date of purchase

** Capable of receiving at up to 56 Kbps and sending at up to 48 Kbps (or 31.2 Kbps with V.90 server). Due to FCC regulations on power output, receiving speeds are limited to 53 Kbps. Actual speeds may vary. V.92 and V.90 features require compatible phone service and support from your Internet Service Provider (ISP). USRobotics modems featuring V.92 enhancements are backward compatible and will negotiate the highest possible speed when connecting to an ISP.*

† Appropriate 3rd party software required.

USRobotics®

A Division of UNICOM® Global
www.usr.com/uk

For connection to the Public Switched Telephone Network (PSTN)



Copyright© 2013 U.S. Robotics Corporation, a Division of UNICOM Global. All rights reserved. U.S. Robotics, and USRobotics are registered trademarks of U.S. Robotics Corporation. Other brand names and product names are for identification purposes only and may be trademarks or registered trademarks of their respective companies.