

Customer Information Sheet

DRAWING No.: M80-701XXXX

SHEET 2 OF 2

IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

ORDER CODE:

M80-701XXXX


TOTAL No. OF CONTACTS:
27, 36, 45, 51, 63

FINISH:

05 = GOLD
22 = GOLD + TIN/LEAD
42 = GOLD + 100% TIN

NOTES:

1. FROM No. 1 POSITION, CONTACTS
NUMBERED IN SEQUENCE FROM
RIGHT TO LEFT AND FROM
BOTTOM ROW TO TOP ROW (SEE BELOW).



No. 1 CONTACT

SPECIFICATION:

MATERIAL:

MOULDING = POLYAMIDE 46 UL94V-0, BLACK
CONTACT = PHOSPHOR BRONZE
JACKSCREWS = STAINLESS STEEL

FINISH (ALL OVER NICKEL):

05 = 0.25 - 0.3µ GOLD
22 = 0.75µ GOLD ON CONTACT AREA, 3.0µ 90/10 TIN/LEAD ON TAILS
42 = 0.75µ GOLD ON CONTACT AREA, 3.0µ 100% TIN ON TAILS

ELECTRICAL:

CURRENT RATING AT 25°C = 3.0A MAX
CURRENT RATING AT 85°C = 2.2A MAX
VOLTAGE PROOF = 360V AC/DC
CONTACT RESISTANCE (INITIAL) = 20mΩ MAX
(AFTER CONDITIONING) = 25mΩ MAX
INSULATION RESISTANCE (INITIAL) = 1,000MΩ MIN
(AFTER CONDITIONING) = 100MΩ MIN

MECHANICAL:





DURABILITY = 500 OPERATIONS
MAXIMUM INSERTION FORCE = No. OF CONTACTS x 2.8N
MAXIMUM WITHDRAWAL FORCE = No. OF CONTACTS x 1.8N
MINIMUM WITHDRAWAL FORCE = No. OF CONTACTS x 0.2N

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PACKING:
TRAYS

FOR COMPLETE SPECIFICATION, SEE COMPONENT
SPECIFICATION C017XX (LATEST ISSUE)

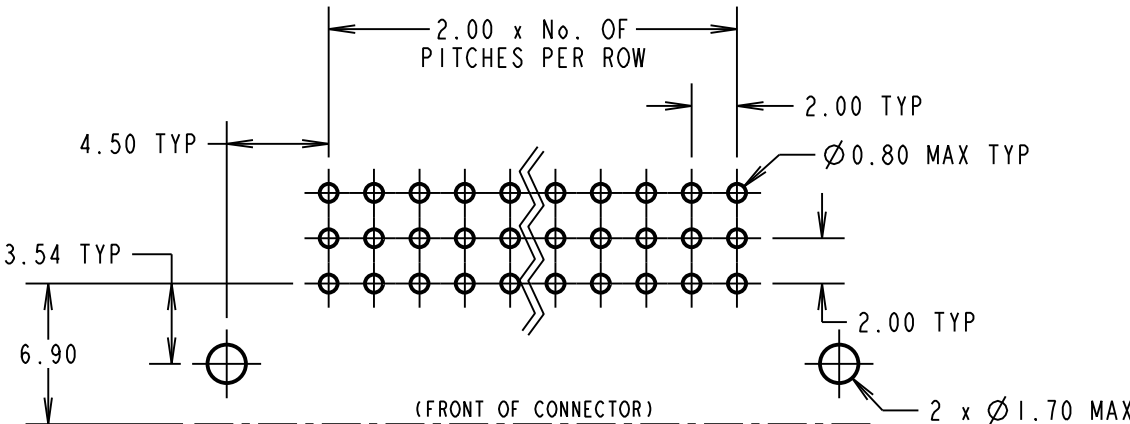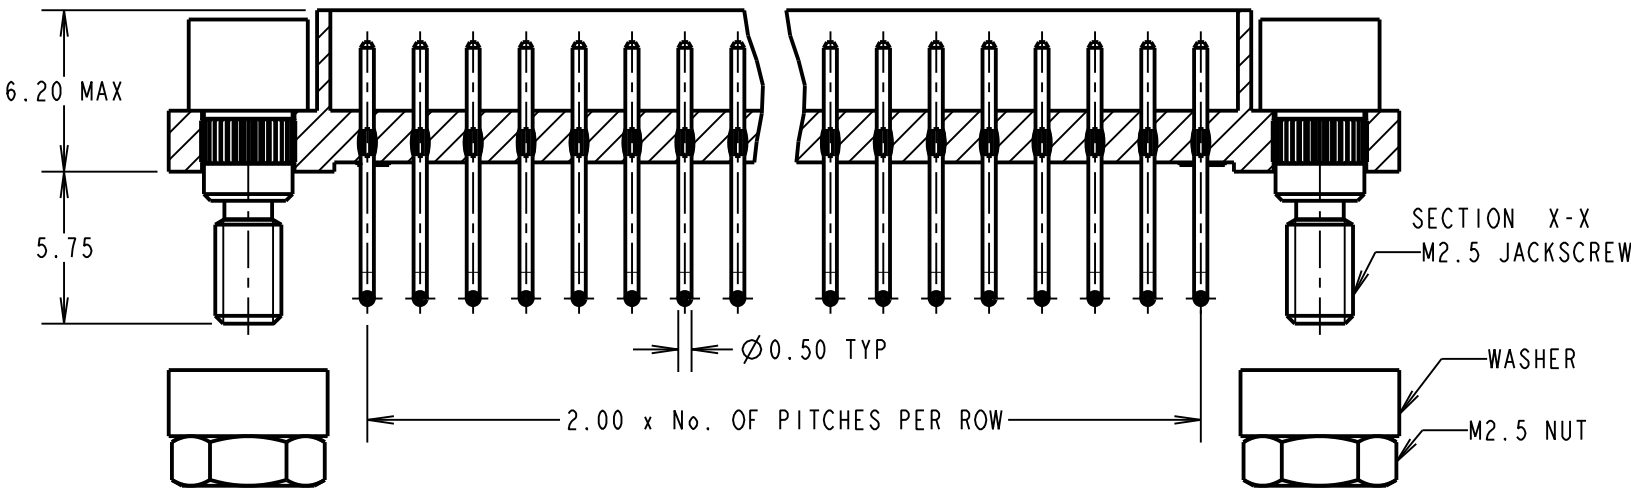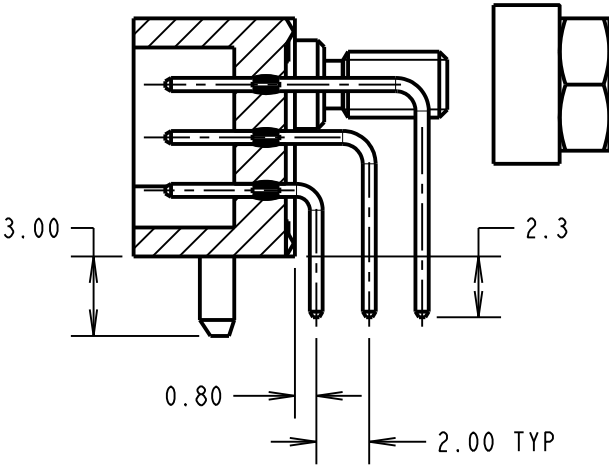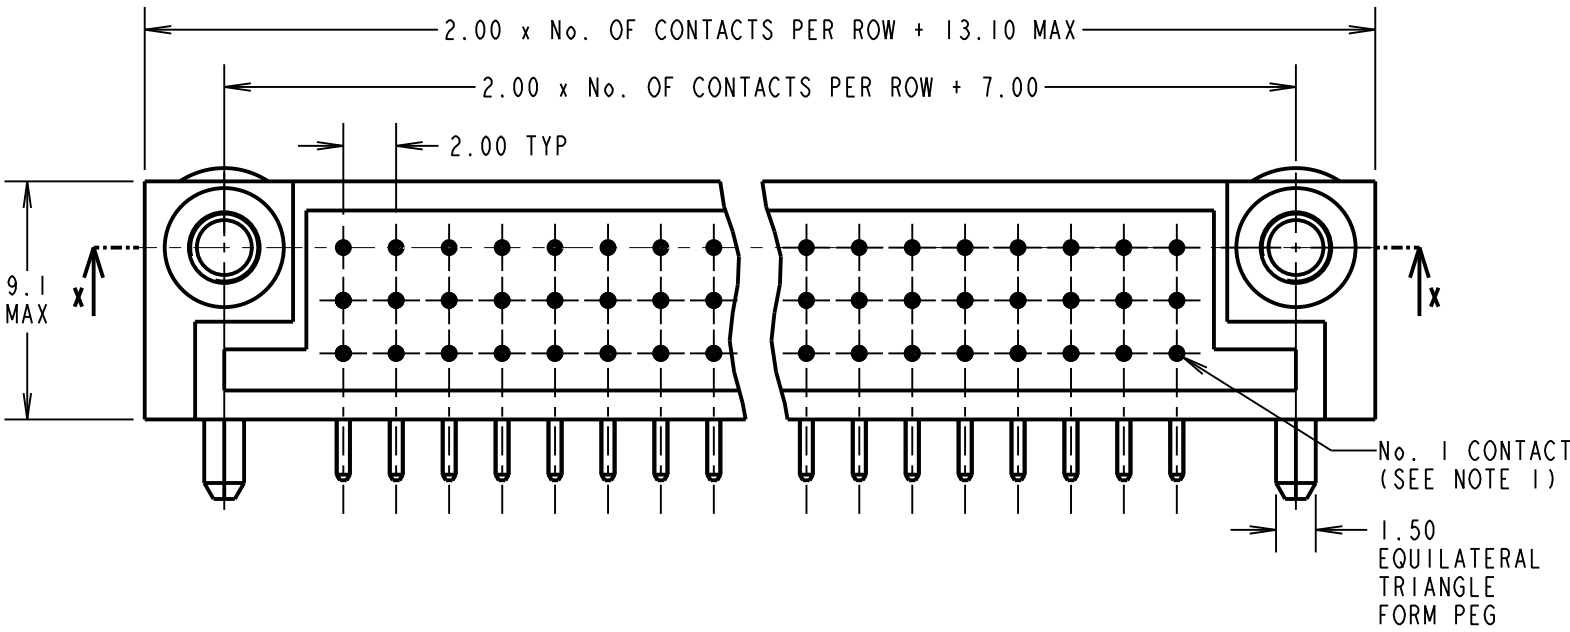

RECOMMENDED PCB LAYOUT

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE TABLE

S/AREA: mm²

TITLE: DATAMATE J-TEK
3-ROW MALE HORIZ. PC TAIL
ASSEMBLY WITH JACKSCREWS

DRAWING NUMBER:

M80-701XXXX

SHT
2 OF 2

SM	7	05.12.11	11576
NAME	ISS.	DATE	C/NOTE
APPROVED: S. MCCULLAGH			
CHECKED: M. G. PLESTED			
DRAWN: I. SANDY			
CUSTOMER REF.:			
ASSEMBLY DRG:			