

## SMT STRATUM 3 DIGITAL TCXO 101 SERIES

### ■ FEATURES:

- Fully meeting free run frequency accuracy and 24 hours maximum frequency drift requirements for STRATUM 3 according to Telecordia GR-1244-CORE (Issue 2)\*
- Very low power consumption suitable for portable and/or battery operated equipment

### ■ ELECTRICAL SPECIFICATION\*\*

PARAMETER	SYMBOL	CONDITIONS	VALUE	UNIT
Supply voltage, nom.	Vs	Vs±5%	3.0   5.0	V
Supply current, max.	Is	Vs, nom. / Ta=25°C	2.0 to 15.0	mA
Frequency, nom.	fo	-	10.000 to 40.000	MHz
Overall frequency stability over 10 years of operation including Initial Frequency Calibration	Δfc/fo	Ta=-40°C to + 85°C	±4.6	ppm
Frequency drift during 24 hours of continuous operation, max (See note 1)	Δfc/fo	Ta=-40°C to + 85°C or Ta 0°C to + 70°C	±0.37	ppm
Temperature Stability (See note 2)		Ta=-40°C to + 85°C	±0.30	ppm
		Ta=0°C to + 70°C	±0.28	ppm
Control voltage range (see note 3)	Vc	-	+0.25...+2.25	V
Frequency Adjustment Range (see note 3)	Δf/fo (Vc)	Vc= 0.25V	-5 ...-10	PPM
		Vc= Vs-0.25V	+5 ...+10	PPM
Voltage control (pin 1) input impedance, min. (see note 3)	Z <sub>in</sub>	-	100	kΩ
Jitter (peak to peak), max (F <sub>nom</sub> = 20 MHz)	J(f)	Offset Δf = 12kHz to 20MHz	10	ps
Phase noise SSB @ freq.offset, max (F <sub>nom</sub> = 20 MHz)	£ (Δf)	Δf=10Hz	-80	dBc/Hz
		Δf=100Hz	-110	dBc/Hz
		Δf=1kHz	-130	dBc/Hz
		Δf ≥ 10kHz	-145	dBc/Hz
HCMOS output levels Clipped Sine	VOH/VOL	Load = 15pF	0.9V <sub>cc</sub> / 0.1V <sub>cc</sub>	V
	V <sub>out</sub>	Load=10 kΩ  20pF	0.7	V <sub>p-p</sub>

### ■ ENVIRONMENTAL SPECIFICATION

Storage temperature range	-	-45°C....+85°C	
Vibration	-	IEC 68-2-6, test Fc: 10..500 Hz, 10g, 2 h, 3 directions	All parameters within initial limits
Mechanical shocks	-	IEC 68-2-27, test Ea: 100g, ½ sine, 3 bumps, 6 directions	All parameters within initial limits


#### Notes:

1. The 24 hours drift can be measured any time after minimum 1 hour from initial turn on. Please contact factory for details.
2. The Temperature Stability is calculated with regard to frequency reading at 25°C±1°C.
3. Parameter relevant only to products with TY prefix.

\* Telecordia is a trademark of Telecordia Technologies

\*\* This specification is typical. Other frequencies, output types and custom parameters are available. Please, contact factory for details.

## REFLOW PROFILE

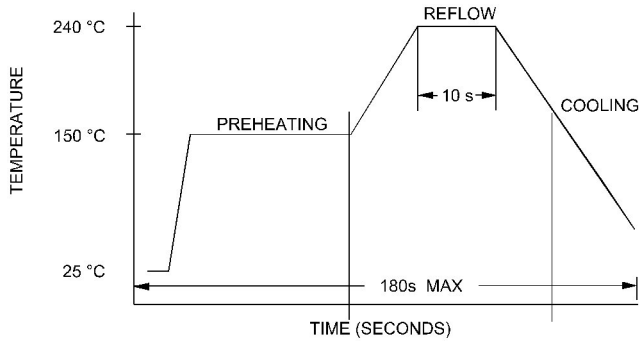


## HOW TO ORDER (PART NUMBER)

Prefix	Output Type	Series	Revision	Temperature Range	Stability	Frequency
TU; No Freq. Adjust option  TY; With Freq Adjust	0: CLIPPED SINE 2:HCMOS 4:LVC MOS	101	A	First letter Lowest Temperature, Second letter Highest Temperature: LZ: +0°C to +70°C D3: -40°C to +85°C	Value x 10E-6  Example  0.28= 0.28PPM  0.5= 0.5PPM	In MHZ

Example:

**TU0101A-LZ- 0.28 -19.440 - STR3** ← Stratum 3

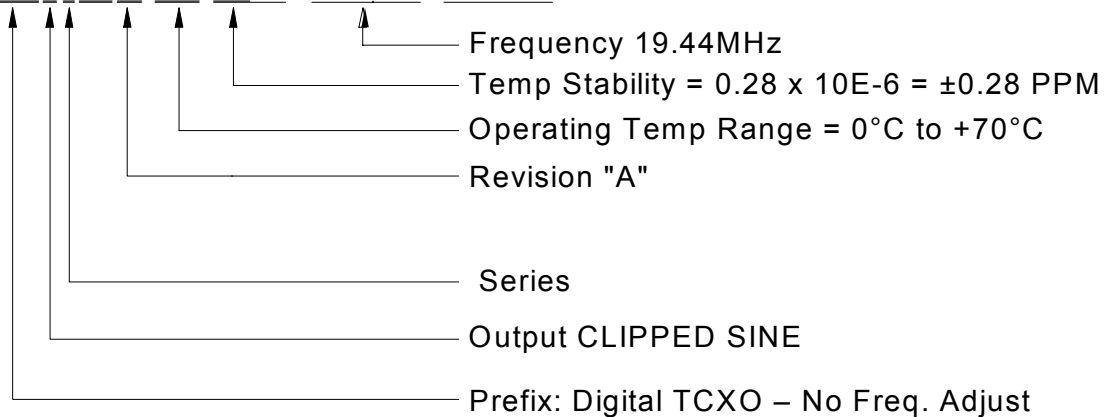

■ MECHANICAL SPECIFICATION

