


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	36.05	36.15	36.25
Insertion Loss (dB):	-	-	27.80	29.50
Passband Ripple (dB):	-	-	0.60	0.80
-3dB Bandwidth (MHz):	-	8.00	8.12	-
-40dB Bandwidth (MHz):	-	-	9.85	10.00
Ultimate Rejection (dB):	-	50.00	52.00	-
Operating Temperature Range (°C):	-	-	25	-
Substrate Material:	-	-	128LiNbO ₃	-
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = 25°C

MECHANICAL DIMENSIONS

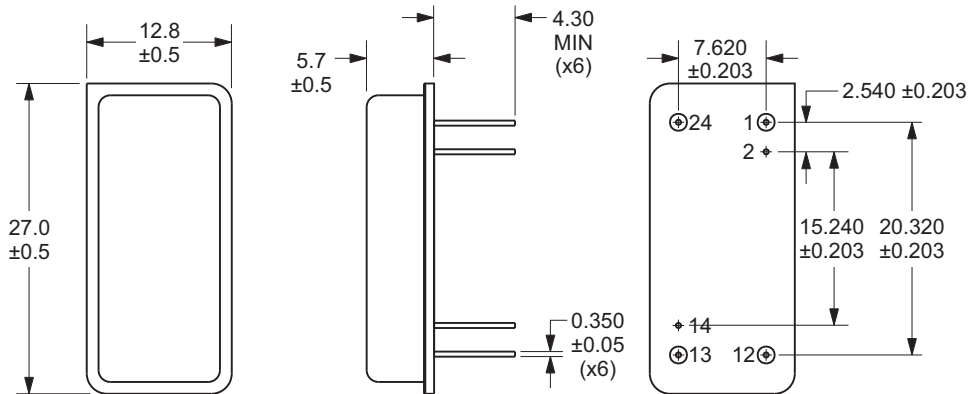

Pin	Function
1	Ground
2	Ground
12	Output
13	Ground
14	Ground
24	Input

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM




MARKING GUIDE

(Line #1) **AMPLITRONIX**

(Line #2) **ABFF063C**

(Line #3) **XX Y ZZ**



Part Number: ABFF063C

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760