


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	267.50	-
Insertion Loss (dB):	-	-	14.30	16.00
Passband Ripple (dB):	-	-	1.00	2.00
-1dB Bandwidth (MHz):	-	35.00	38.40	-
-3dB Bandwidth (MHz):	-	-	40.08	-
-40dB Bandwidth (MHz):	-	-	48.85	70.00
Ultimate Rejection (dB):	Fo ±35MHz	35.00	38.00	-
Group Delay Variation (nSec):	-	-	60.00	-
Substrate Material:	-	-	YZ	-
Operating Temperature Range (°C):	-	-	25	-
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = 25°C


MECHANICAL DIMENSIONS

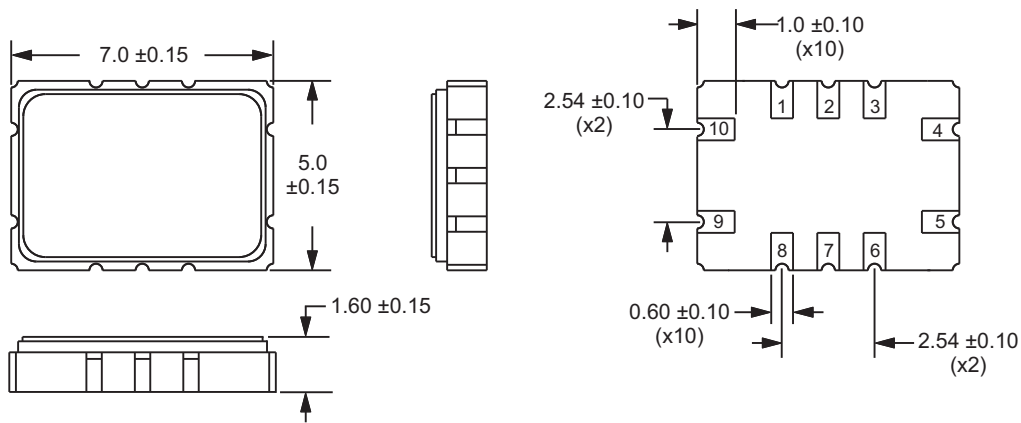

Pin	Function
1-3	Ground
4	Output
5-8	Ground
9	Input
10	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

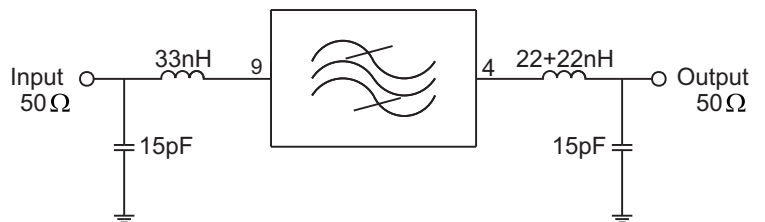

MARKING GUIDE

Line 1: ABFF
Line 2: 075A

NOTE: RoHS Compliant (Pb-free)



Part Number: ABFF075A

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760