


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	385.00	-
Insertion Loss (dB):	at Fo	-	13.50	15.00
Passband Ripple (dB):	-	-	0.70	1.00
-1dB Bandwidth (MHz):	-	30.00	33.55	-
-3dB Bandwidth (MHz):	-	-	35.30	-
-35dB Bandwidth (MHz):	-	-	42.10	62.00
Ultimate Rejection (dB):	Fo 35MHz	35.00	38.00	-
Group Delay Variation (nSec):	-	-	60.00	-
Substrate Material:	-	-	YZ	-
Operating Temperature Range (°C):	-	-	25	-
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = 25°C


MECHANICAL DIMENSIONS

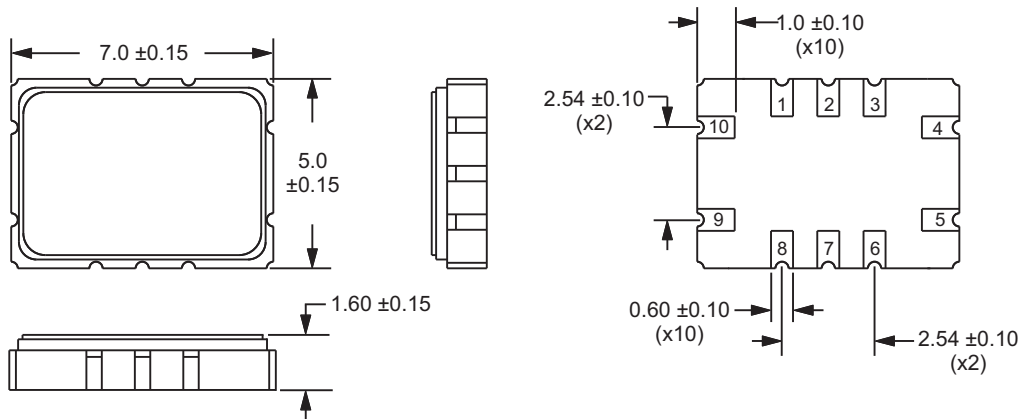

Pin	Function
1-3	Ground
4	Output
5-8	Ground
9	Input
10	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

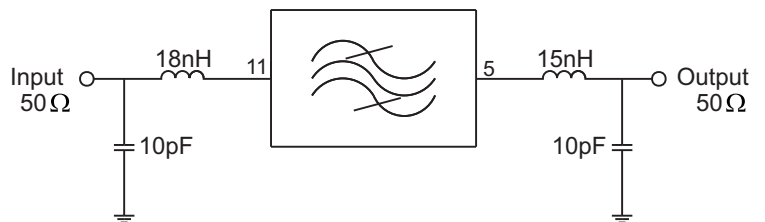

MARKING GUIDE

Line 1: ABFF
Line 2: 076A

NOTE: RoHS Compliant (Pb-free)



Part Number: ABFF076A

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760