


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	915.0	-
Insertion Loss (dB):	911.5MHz to 918.5MHz	-	-	4.5
Passband Ripple (dB):	911.5MHz to 918.5MHz	-	-	2.0
Attenuation (dB):	Fo-45MHz to Fo-41MHz	40.0	-	-
	Fo-23MHz to Fo-20MHz	30.0	-	-
	Fo+20MHz to Fo+23MHz	20.0	-	-
	Fo+41MHz to Fo+46MHz	40.0	-	-
Operating Temperature Range (°C):	-	-10	25	60
Storage Temperature Range (°C):	-	-20	25	70
Input Power (in Passband)(dBm):	-	-	-	10.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-


MECHANICAL DIMENSIONS

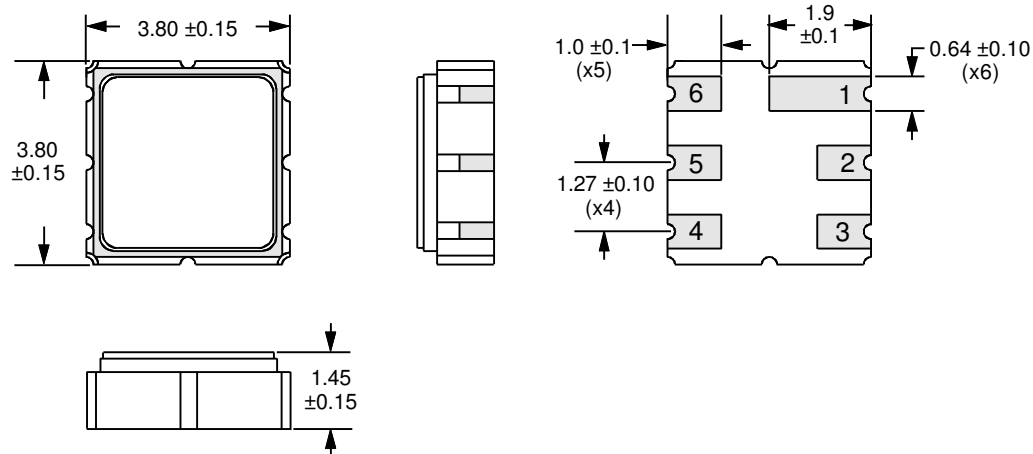

Pin	Function
1	Ground
2	Input
3-4	Ground
5	Output
6	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

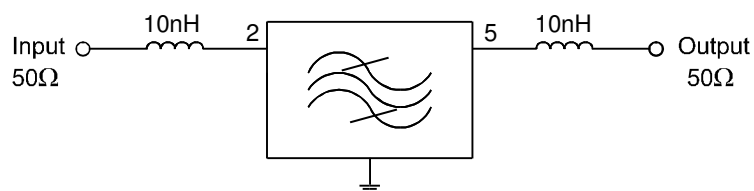

MARKING GUIDE

Line 1: ABFF
Line 2: 01BF



Part Number: ABFF01BF

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760