
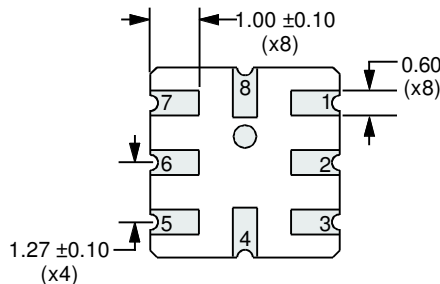



STANDARD SPECIFICATIONS


Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (Fc) (MHz):	-	-	1090.00	-
Passband Width (MHz):	-	-	±6.00	-
Insertion Loss (dB):	1084MHz - 1096MHz	-	4.00	5.50
Passband Ripple (dB):	1084MHz - 1096MHz	-	1.00	3.00
Relative Attenuation (dB):	840MHz to Fc -75MHz	36.00	42.00	-
	Fc -75MHz to Fc -30MHz	44.00	50.00	-
	Fc +30MHz to Fc +60MHz	22.00	27.00	-
	Fc +60MHz to Fc +175MHz	35.00	40.00	-
	Fc +175MHz to 1340MHz	42.00	50.00	-
Operating Temperature Range (°C):	-	-40	25	85
Storage Temperature Range (°C):	-	-40	25	85
Input Power (in Passband)(dBm):	-	-	-	0.0
DC Voltage (Vdc):	-	-	-	0.0
Terminating Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
 Operating Temperature = -40°C to 85°C

MECHANICAL DIMENSIONS




Pin	Function
1	Ground
2	Input
3-5	Ground
6	Output
7-8	Ground



ALL DIMENSIONS
IN MILLIMETERS

CONNECTION DIAGRAM

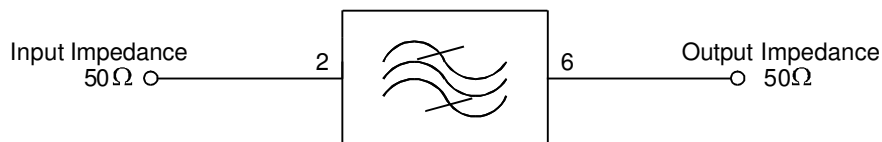

MARKING GUIDE

(Line #1) **ABFF**
 (Line #2) **03C9**



Part Number: ABFF03C9

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760