


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	1415.00	-
Insertion Loss (dB):	1395MHz to 1435MHz	-	3.50	5.00
Amplitude Variation (dB):	1395MHz to 1435MHz	-	-	1.50
Ultimate Attenuation (dB):	300kHz to 900MHz	25.00	-	-
	900MHz to 960MHz	40.00	-	-
	960MHz to 1320MHz	30.00	-	-
	1500MHz to 1860MHz	30.00	-	-
	1860MHz to 1910MHz	40.00	-	-
	1910MHz to 3000MHz	40.00	-	-
Voltage Standing Wave Ratio:	-	-	-	2:1
Operating Temperature Range (°C):	-	-10	25	65
Storage Temperature Range (°C):	-	-40	25	85
Input Power (in Passband)(dBm):	-	-	10.0	13.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
 Operating Temperature = -10°C to +65°C


MECHANICAL DIMENSIONS

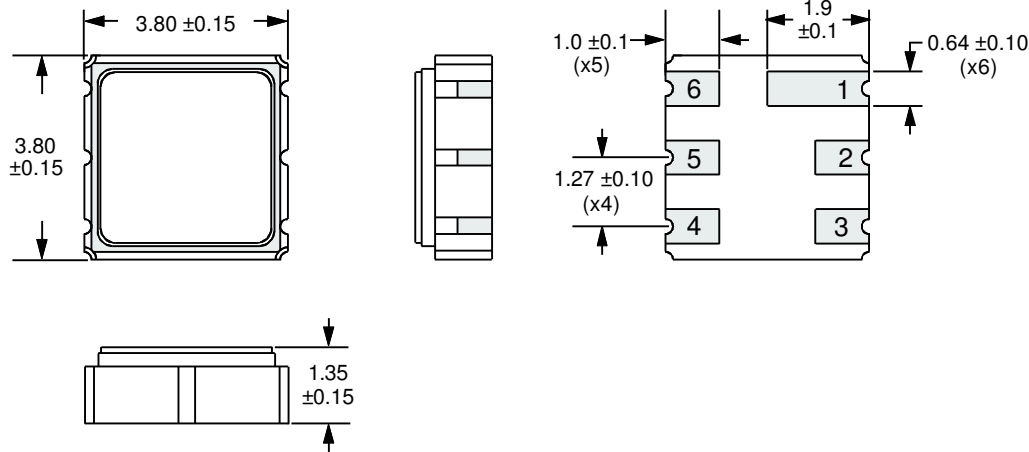

Pin	Function
1	Ground
2	Input
3-4	Ground
5	Output
6	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

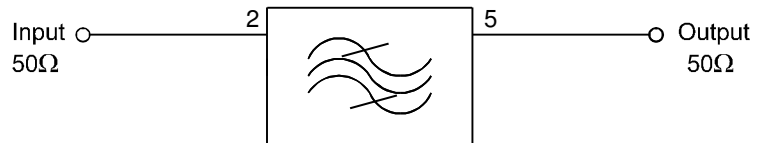

MARKING GUIDE

Line 1: ABFF
 Line 2: 0402



Part Number: ABFF0402

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760