


## STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	410.00	-
Insertion Loss (dB):	408.0MHz - 412.0MHz	-	3.00	4.50
Passband Width (MHz):	-	-	±2.00	-
Passband Ripple (dB):	408.0MHz - 412.0MHz	-	-	2.00
Attenuation (dB):	Fo-100.0MHz to Fo-40.8MHz	45.00	50.00	-
	Fo+30.0MHz to Fo+100.0MHz	50.00	53.00	-
Operating Temperature Range (°C):	-	-40	25	85
Storage Temperature Range (°C):	-	-40	25	85
Input Power (in Passband)(dBm):	-	-	-	0.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-


**Comments:** Unless otherwise specified, all of the above specifications are under the following conditions:  
 Operating Temperature = -40°C to +85°C

## MECHANICAL DIMENSIONS

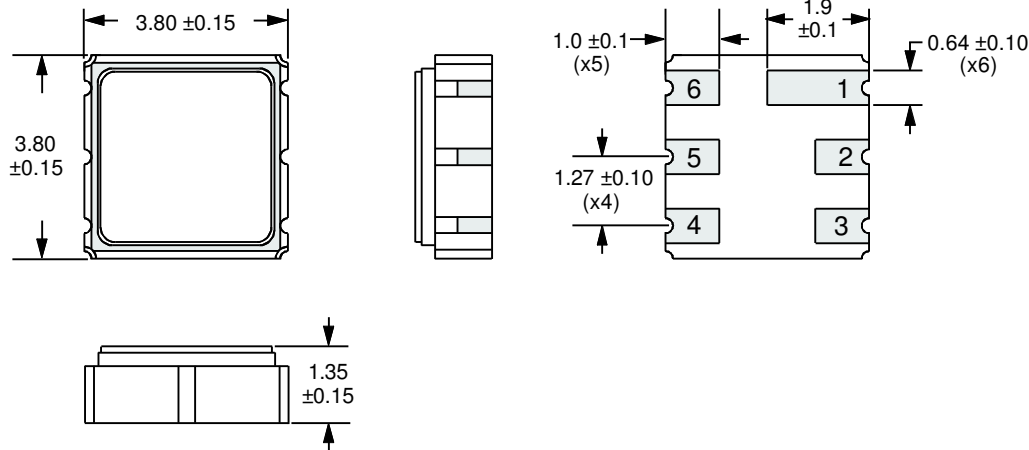

ALL DIMENSIONS  
IN MILLIMETERS

## MATCHING NETWORK DIAGRAM

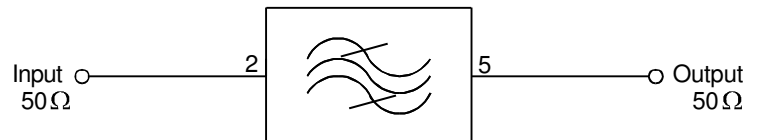

## MARKING GUIDE

Line 1: ABFF  
 Line 2: 0404



Part Number: ABFF0404

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760