


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (Mhz):	-	-	446.000	-
Passband Width (Mhz):	-	-	±2.0	-
Insertion Loss (dB):	444MHz - 448MHz	-	-	4.5
Passband Ripple (dB):	444MHz - 448MHz	-	-	2.0
Attenuation (dB):	Fo-100 to Fo-40.8MHz	50.0	-	-
	Fc+40.8MHz to Fc+100MHz	50.0	-	-
Operating Temperature Range (°C):	-	-10	25	+50
Storage Temperature Range (°C):	-	-40	25	+85
Input Power (in Passband)(dBm):	-	-	-	0.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-


Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = -10°C to +50°C

MECHANICAL DIMENSIONS

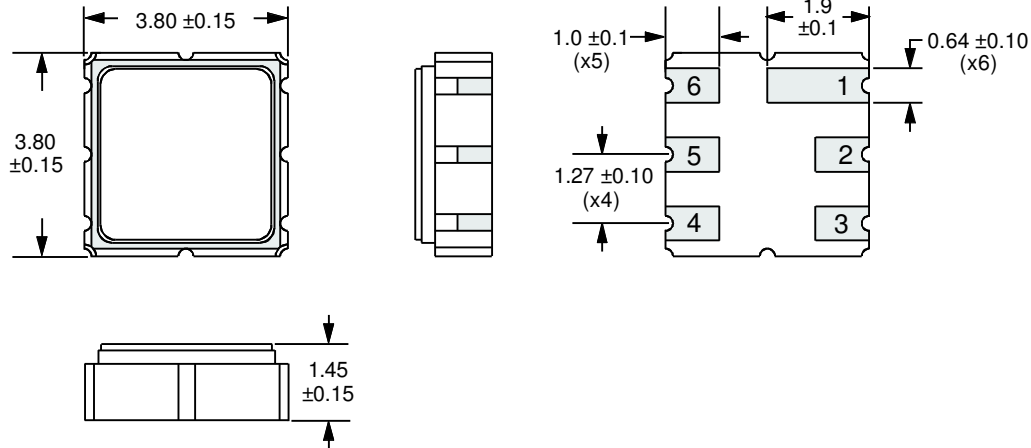

ALL DIMENSIONS
IN MILLIMETERS

CONNECTION DIAGRAM

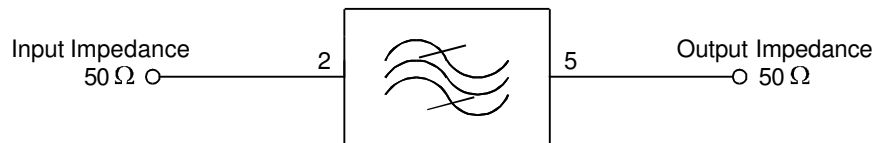

MARKING GUIDE

(Line #1) **ABFF**
(Line #2) **0483**