


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	424.00	-
Passband Width (MHz):	-	-	±2.00	-
Insertion Loss (dB):	422.0MHz - 426.0MHz	-	2.50	4.50
Passband Ripple (dB):	422.0MHz - 426.0MHz	-	1.00	2.00
Attenuation (dB):	fc -100.0MHz to fc -40.8MHz	50.00	-	-
	fc +40.8MHz to fc +100.0MHz	50.00	-	-
Operating Temperature Range (°C):	-	-10	25	+50
Storage Temperature Range (°C):	-	-40	25	+85
Input Power (in Passband)(dBm):	-	-	-	0
DC Voltage (Vdc):	-	-	-	10
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = -10°C to +50°C


MECHANICAL DIMENSIONS

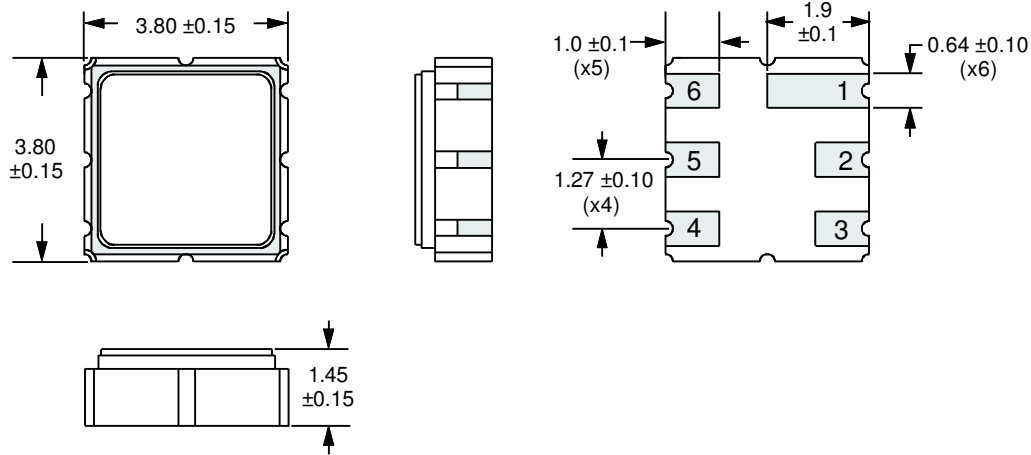

Pin	Function
1	Ground
2	Input
3-4	Ground
5	Output
6	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

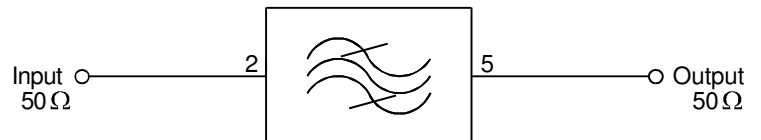

MARKING GUIDE

Line 1: ABFF
Line 2: 0493



Part Number: ABFF0493

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760