


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	959.500	-
Insertion Loss (dB):	957.5MHz to 961.5MHz	-	-	4.50
Passband Ripple (dB):	957.5MHz to 961.5MHz	-	-	1.50
Attenuation (dB):	DC to 879.5MHz	-	-	55.00
	879.5MHz to 914.5MHz	-	-	45.00
	1001.1MHz to 1019.5MHz	-	-	40.00
	1019.5MHz to 1500.0MHz	-	-	55.00
Operating Temperature Range (°C):	-	-10	25	+60
Storage Temperature Range (°C):	-	-20	25	+70
Input Power (in Passband)(dBm):	-	-	-	10.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
 Operating Temperature = -10°C to +60°C


MECHANICAL DIMENSIONS

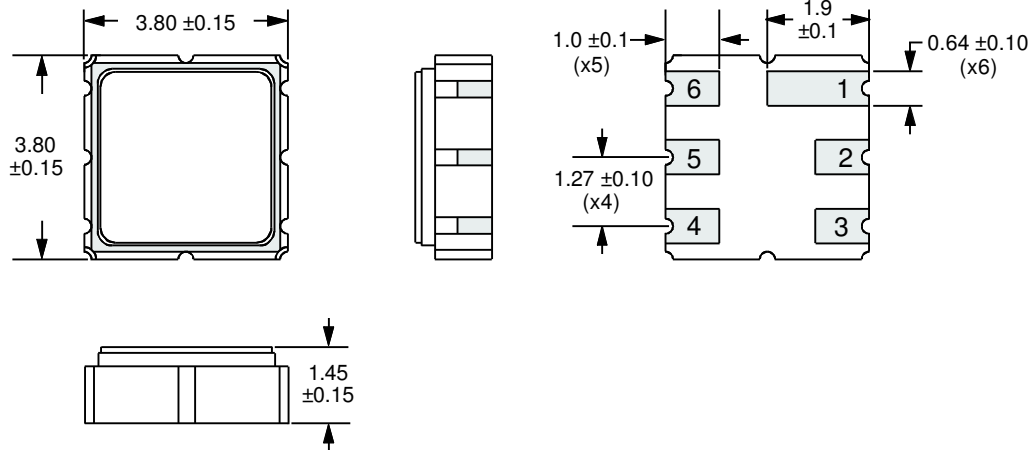

Pin	Function
1	Ground
2	Input
3-4	Ground
5	Output
6	Ground

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

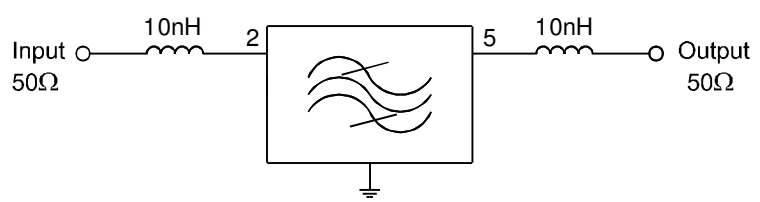

MARKING GUIDE

Line 1: ABFF
 Line 2: 0499



Part Number: ABFF0499

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760