


STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	924.00	-
Insertion Loss (dB):	-	-	2.80	4.00
Passband Width (MHz):	-	-	±2.00	-
Attenuation (dB):	Fo-100.0MHz to Fo-40.8MHz	40.00	45.00	-
	Fo+50.0MHz to Fo+100.0MHz	40.00	45.00	-
Operating Temperature Range (°C):	-	-10	25	50
Storage Temperature Range (°C):	-	-30	25	80
Input Power (in Passband)(dBm):	-	-	-	10.0
DC Voltage (Vdc):	-	-	-	10.0
Termination Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-


Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
 Operating Temperature = -10°C to +50°C

MECHANICAL DIMENSIONS

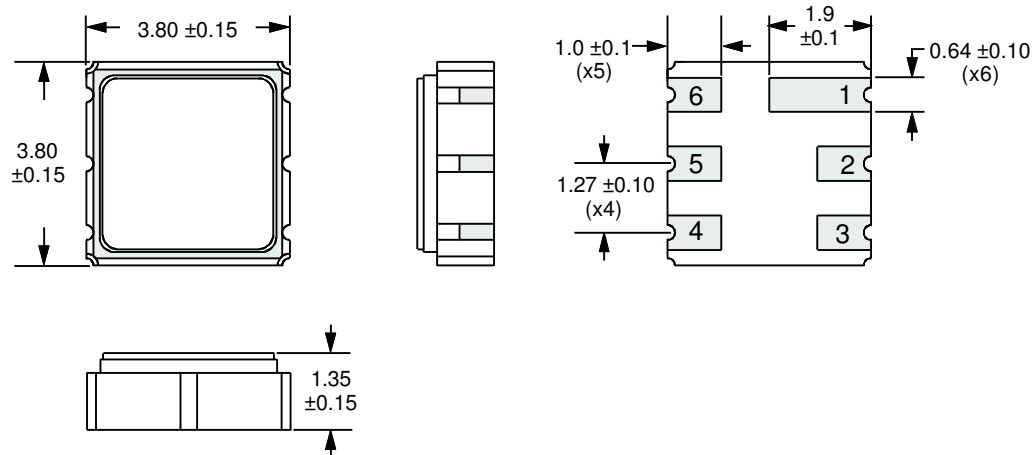

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK DIAGRAM

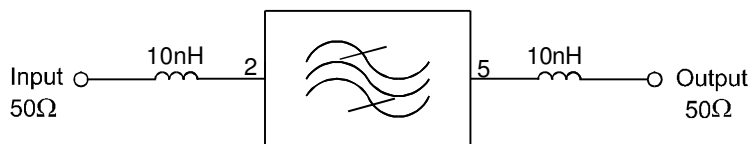

MARKING GUIDE

Line 1: ABFF
 Line 2: 049F



Part Number: ABFF049F

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760