
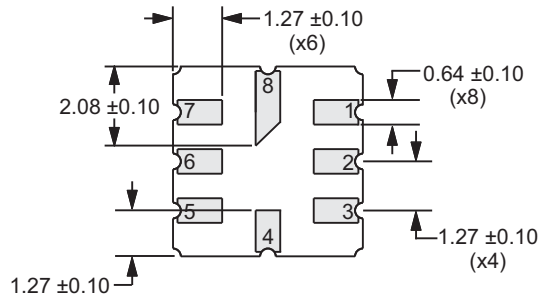



## STANDARD SPECIFICATIONS

Parameter	Condition	Minimum	Typical	Maximum
Center Frequency (MHz):	-	-	281.00	-
Insertion Loss (dB):	277.9MHz - 284.1MHz	-	-	4.50
Passband Ripple (dB):	277.9MHz - 284.1MHz	-	-	2.00
Attenuation (dB):	Fc -100.0MHz to Fc -39.5MHz	50.00	-	-
	Fc +39.5MHz to Fc +100.0MHz	50.00	-	-
Operating Temperature Range (°C):	-	-40	25	85
Storage Temperature Range (°C):	-	-45	-	85
Input Power (in Passband)(dBm):	-	-	-	0.0
DC Voltage (Vdc):	-	-	-	15.0
Terminating Source Impedance (Ohms):	-	-	50	-
Termination Load Impedance (Ohms):	-	-	50	-

**Comments:** Unless otherwise specified, all of the above specifications are under the following conditions:  
 Operating Temperature = -40°C to +85°C

## MECHANICAL DIMENSIONS



Pin	Function
1	To Be Grounded
2	Input/Output
3	To Be Grounded
4	Case Ground
5	To Be Grounded
6	Output/Input
7	To Be Grounded
8	Case Ground

ALL DIMENSIONS  
IN MILLIMETERS

## CONNECTION DIAGRAM



## MARKING GUIDE

(Line #1) **ABFF**  
 (Line #2) **0773**

**NOTE: RoHS Compliant (Pb-free)**



Part Number: ABFF0773

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760