


STANDARD SPECIFICATIONS

Parameter	Minimum	Typical	Maximum
Center Frequency (MHz):	119.130	119.200	119.270
Insertion Loss (dB):	-	-	3.0
Temperature Coefficient of Frequency (ppm/°C ²):	-	0.032	-
Operating Temperature Range (°C):	-40	25	85
Storage Temperature Range (°C):	-55	25	85
DC Voltage Between Terminals (Vdc):	-30.0	-	30.0
Frequency Aging - Absolute Value During the 1st Year (ppm/yr):	-	-	10.0
DC Insulation Resistance Between any two Terminals (MΩ):	1.0	-	-

Comments: Unless otherwise specified, all of the above specifications are under the following conditions:
Operating Temperature = 25 °C


MECHANICAL DIMENSIONS

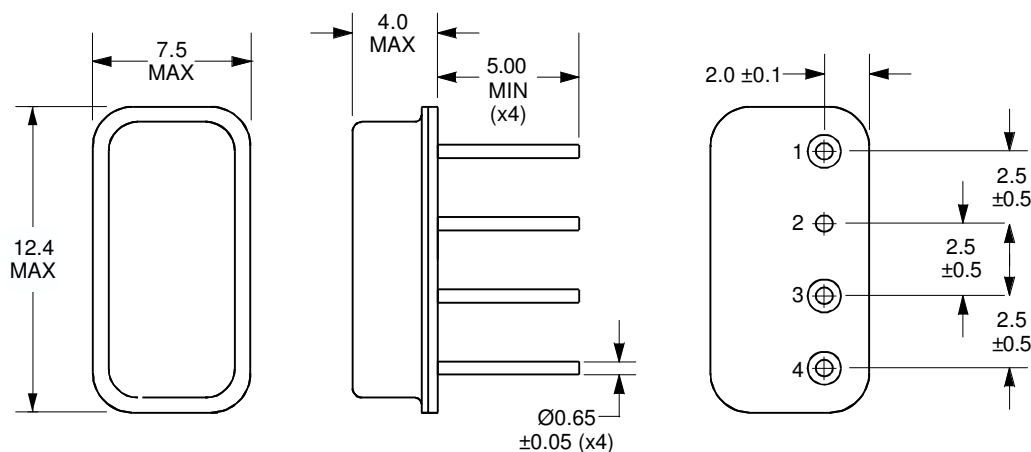

Pin	Function
1	Input
2	Ground
3	Output
4	No Connect

ALL DIMENSIONS
IN MILLIMETERS

MATCHING NETWORK CONFIGURATION

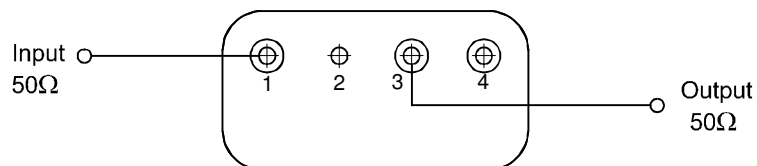

MARKING GUIDE

(Line #1) **AREE0074**



Part Number: AREE0074

3545-B Cadillac Avenue • Costa Mesa, CA 92626-1401 • (714) 918-4752 • Fax (714) 918-4760