



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)821-7413  
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 5062**  
**1 - 1000 MHz**  
**100 WATTS**  
**LINEAR POWER RF AMPLIFIER**

### Solid State Broadband High Power RF Amplifier

The 5062 is a 100 Watt broadband amplifier that covers the 1 – 1000 MHz frequency range. This small and lightweight amplifier utilizes Class A/AB linear power devices that provide an excellent 3<sup>rd</sup> order intercept point, high gain, and a wide dynamic range.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR<sub>RF</sub> amplifiers, the 5062 comes with an extended multiyear warranty.

#### CIRCUIT PROTECTIONS

- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

#### ORDERING MODELS

- ◇ RE - Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ FE - Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- ◇ R - Rear RF Connector model
- ◇ F - Front RF Connector model

	Parameter	Specification @ 25° C
<b>Electrical</b>		
1	Frequency Range	1 – 1000 MHz
2	Saturated Output Power	100 Watts typical
3	Power Output @ 1dB Comp.	70 Watts min
4	Small Signal Gain	+50 dB min
5	Gain Flatness / with ALC	± 2.5 / ± 0.75 dB max
6	IP <sub>3</sub>	+54 dBm typical
7	Input VSWR	2:1 max
8	Harmonics	-20 dBc typical @ 70 Watts
9	Spurious Signals	< -60 dBc typical @ 70 Watts
10	Input/Output Impedance	50 Ohms nominal
11	AC Input Power	2500 Watts max
12	AC Input	180 – 240 VAC, single phase
13	RF Input	0 dBm
14	RF Input Signal Format	CW/AM/FM/PM/Pulse
15	Class of Operation	AB
<b>Mechanical</b>		
16	Dimensions	19" x 8.75" x 20"
17	Weight	87 Lbs. 39.46 Kgs.
18	Connectors	Type-N
19	Grounding	Chassis
20	Cooling	Internal Forced Air
<b>Environmental</b>		
21	Operating Temperature	0° C to +50° C
22	Operating Humidity	95% Non-condensing
23	Operating Altitude	Up to 10,000' Above Sea Level
24	Shock and Vibration	Normal Truck Transport

Specifications subject to change without notice.




FE Model Shown



5300 Beethoven Street, Los Angeles, CA 90066  
TEL: (310)306-5556 • FAX: (310)821-7413  
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 5062**  
**1 - 1000 MHz**  
**100 WATTS**  
**LINEAR POWER RF AMPLIFIER**

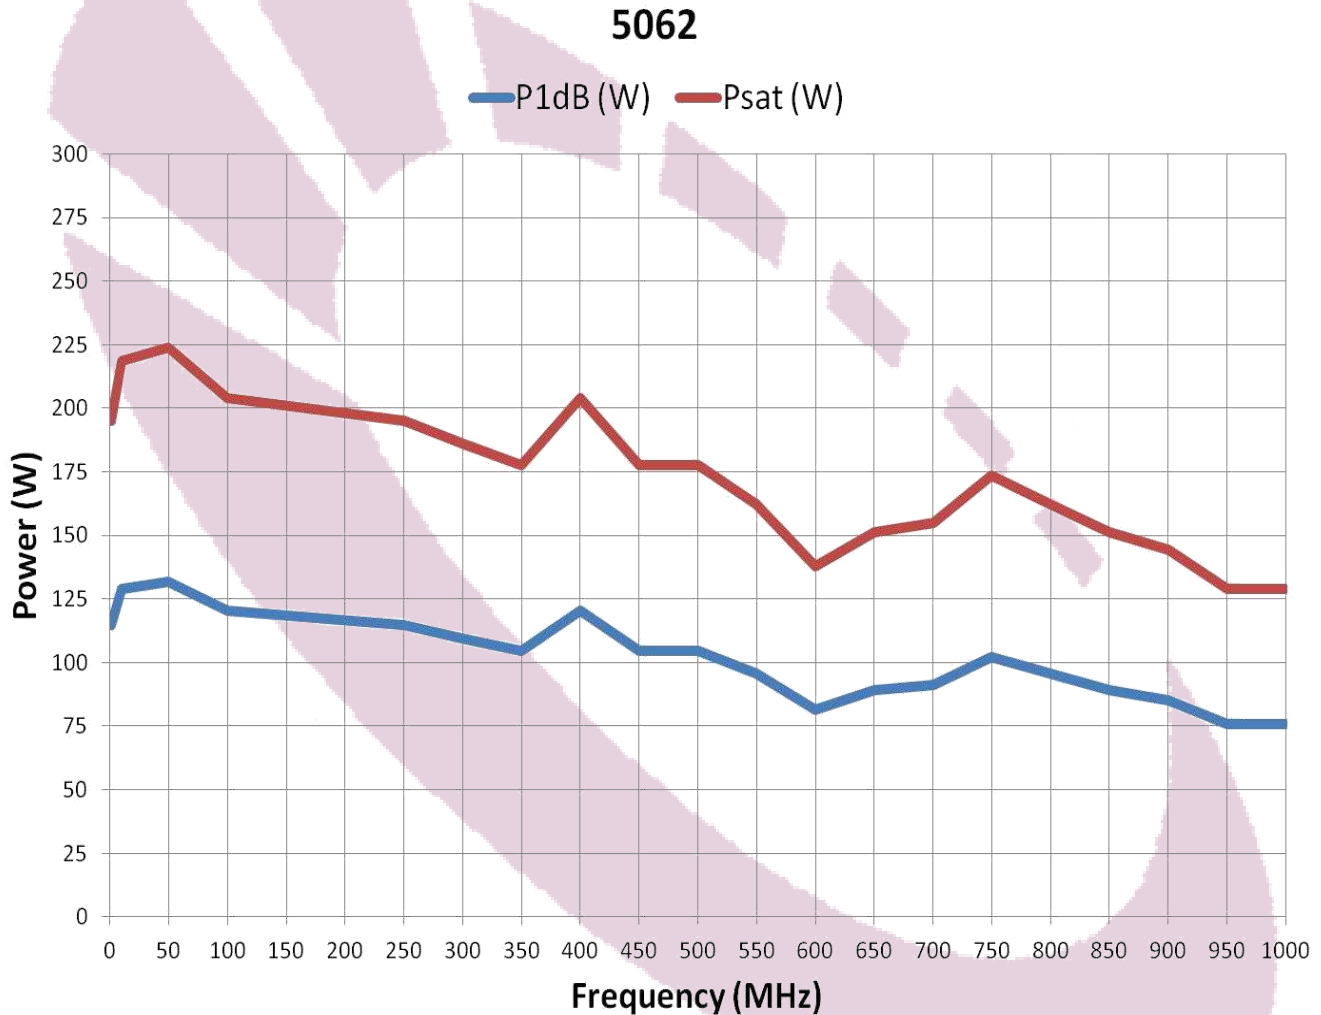

### FRONT PANEL CONTROLLER FEATURES

- ◇ Forward Power Monitoring
- ◇ Reflected Power Monitoring
- ◇ Gain Control (Continuously Variable VVA 20dB)
- ◇ Fault Status
- ◇ Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, phase or input RF level
- ◇ Standby/Enable Control
- ◇ Front Panel Display for easy viewing of System Status Locally
- ◇ Keypad buttons for full local control