



5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7001
20 - 3000 MHz
22 WATTS
BANDED POWER RF AMPLIFIER

**Solid State
 Broadband High
 Power RF Amplifier**

The 7001 is a 22W multi channel broadband system that covers the 20 – 3000 MHz frequency range with a single RF input and Single RF output port.

The system includes RF high power switches controlled by the system controller. The RS232/ Ethernet and/or Front panel key-pad provides full control and reduces the power consumption to the minimum by shutting down the un-selected channel.

The System is configured in a Rear panel Connectors configuration.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<u>Electrical</u>		
1	Frequency Range	20 – 3000 MHz
2	Saturated Power Output	22 Watts typ.
3	Nominal RF drive for rated power	0 dB typ.
4	Small Signal Flatness	+/-2dB
5	Power Output @ P1dB	10 Watts min @ 20 to 1000 MHz 18 Watts typ. @ 1 to 3 GHz
6	Input VSWR	2:1 max
7	Harmonics	-15 dBc typ. @ 20 to 1000 MHz -20 dBc typ. @ 1 to 3 GHz
8	Spurious Signals	< -60 dBc typical
9	Temperature Protection	Baseplate above 80° C
10	AC Power Consumption (only one channel transmit at the time)	250 Watt @ 20 to 1000 MHz 500 Watts @ 1 to 3 GHz
11	AC Power Input	100-240VAC, 1Ø
12	Noise Figure	10dB max
13	Maximum RF Input	+3 dBm max
14	Antenna Switching time	50mS max
<u>Mechanical</u>		
15	Dimensions	19" x 24" x 5.25"
16	Weight	52 Lbs.
17	Connectors	Type-N
18	Grounding	Chassis
19	Cooling	Internal Forced Air
<u>Environmental</u>		
20	Operating Temperature	0° C to +50° C
21	Operating Humidity	95% Non-condensing
22	Operating Altitude	Up to 10,000' Above Sea Level
23	Shock and Vibration	Normal Truck transport

Specifications subject to change without notice






5300 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)577-9887
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 7001

20 - 3000 MHz
22 WATTS
BANDED POWER RF AMPLIFIER

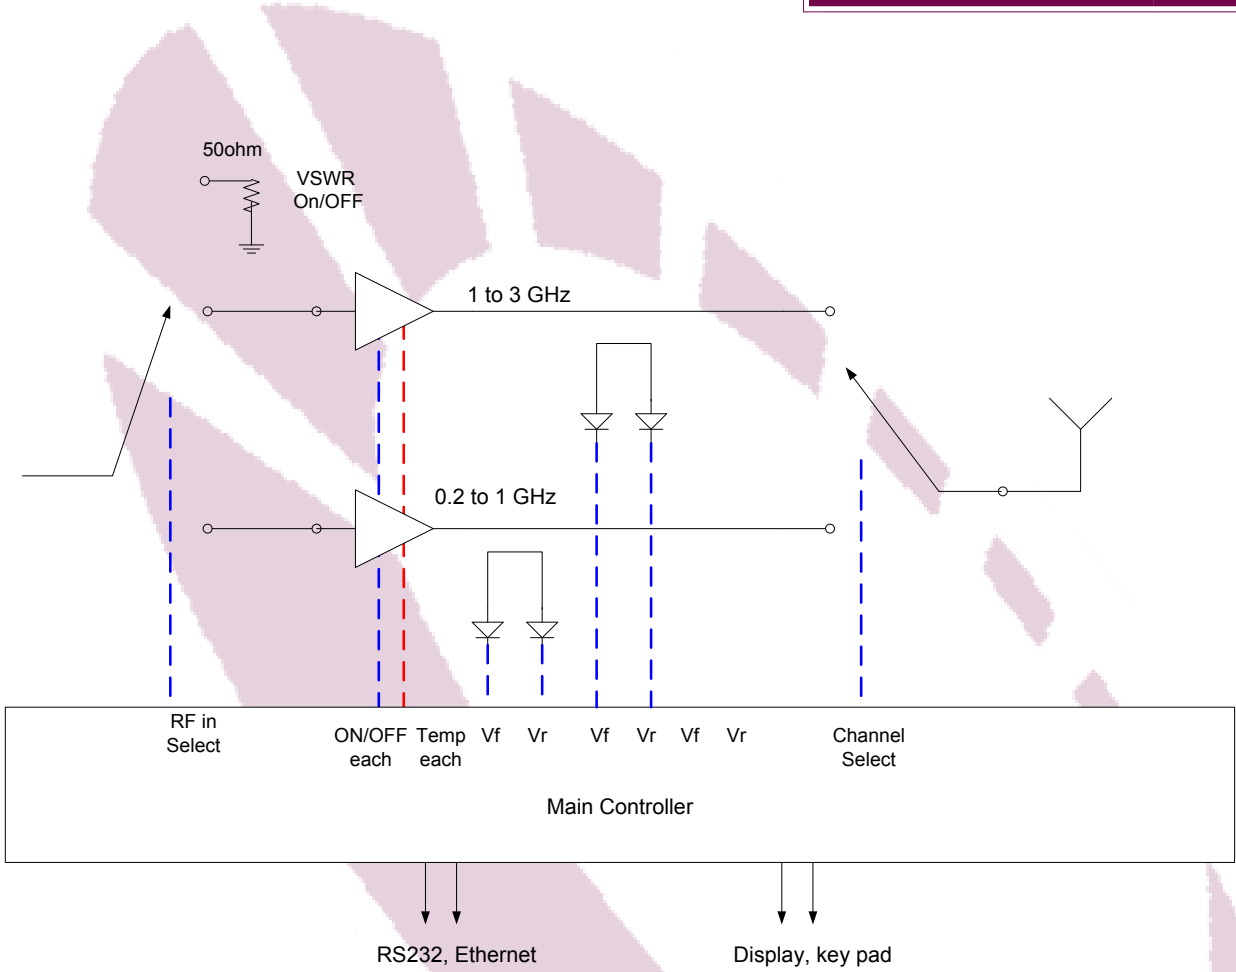

CIRCUIT PROTECTIONS

- ◇ Protection against VSWR of > 2:1 latched with Reset
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage

CONTROL & INDICATIONS

- ◇ AC Circuit Breaker
- ◇ Band Select
- ◇ Forward power of selected channel
- ◇ Reflected Power of selected channel
- ◇ VSWR Fault Reset

