



5300 Beethoven Street, Los Angeles, CA 90066  
 TEL: (310)306-5556 • FAX: (310)821-7413  
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 7009**  
**10KHz - 3000 MHz**  
**30 to 250 WATTS**  
**BANDED POWER RF AMPLIFIER**

**Solid State  
 Broadband High  
 Power RF Amplifier**

The 7009 is a multi channel broadband system that covers the 10KHz – 3000 MHz frequency range with switching capabilities for transmitting into 4 Antennas.

This integrated system provides 30W to 250W power as specified in the spec for any selected frequency range.

The system includes RF high power switches controlled by the system controller. The RS232/ Ethernet and/or Front panel key-pad provides full control of the Antenna interface and reduces the power consumption to the minimum by shutting down the un-selected channels.

	<u>Parameter</u>	<u>Specification @ 25° C</u>
<b><u>Electrical</u></b>		
1	Frequency Range	10Khz – 3000 MHz
2	Saturated Power Output	250 Watts typ. @ 10KHz to 200 MHz 50 Watts min @ 200 to 1000 MHz 30 Watts min @ 1000 to 3000 MHz
3	Nominal RF drive for rated power	0 dB typ.
4	Input VSWR	2:1 max
5	Harmonics	-15 dBc typ.
6	Spurious Signals	> -60 dBc typical
7	Temperature Protection	Baseplate above 80° C
8	AC Power Consumption (one channel transmits)	1250 Watt @ 10KHz to 200MHz 400 Watts @ 200 to 1000 MHz 300 Watts @ 1000 to 3000 MHz
9	AC Power Input	100-240VAC, 1Ø single Phase
10	Maximum RF Input	10 dBm max
11	Antenna Switching time	100mS max
<b><u>Mechanical</u></b>		
12	Dimensions	19" x 26" x 12.25"
13	Weight	150 lb. max
14	Connectors	Type-N
15	Grounding	Chassis
16	Cooling	Internal Forced Air
<b><u>Environmental</u></b>		
17	Operating Temperature	0° C to +50° C
18	Operating Humidity	95% Non-condensing
19	Operating Altitude	Up to 10,000' Above Sea Level
20	Shock and Vibration	Normal Truck transport


Specifications subject to change without notice





5300 Beethoven Street, Los Angeles, CA 90066  
TEL: (310)306-5556 • FAX: (310) 821-7413  
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

**MODEL 7009**  
**10KHz - 3000 MHz**  
**30 to 250 WATTS**  
**BANDED POWER RF AMPLIFIER**

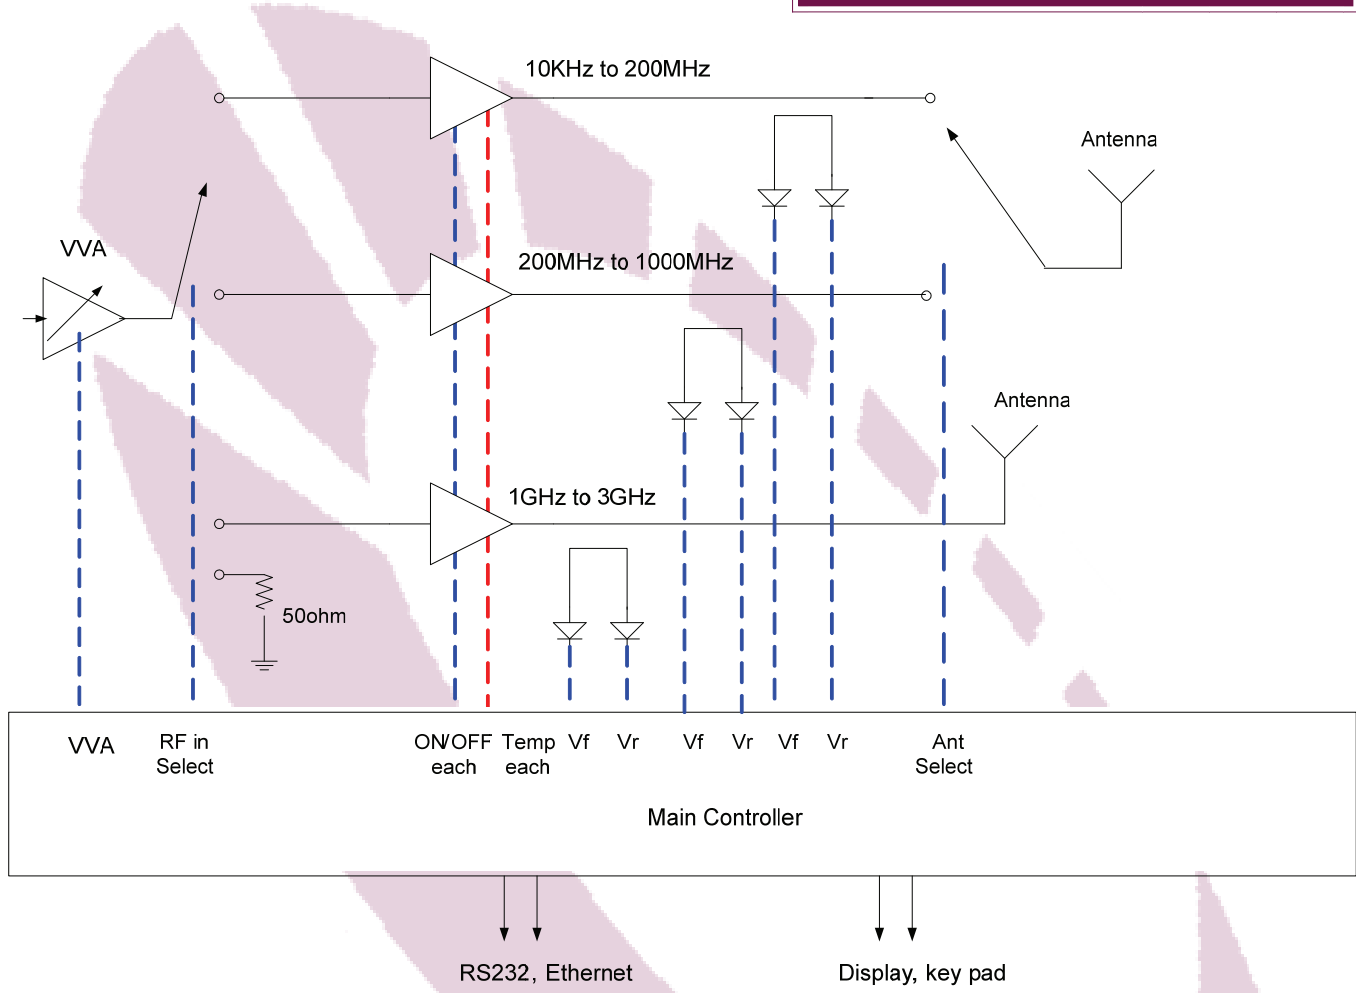

### CIRCUIT INDICATIONS

- ◇ Forward Power
- ◇ Reflected power
- ◇ VSWR Fault
- ◇ Temp Fault
- ◇ Gain Setting (VVA) percentage

### CIRCUIT CONTROL

- ◇ Standby (amplifier disable)
- ◇ Gain/power setting with 25dB range
- ◇ Temp Fault
- ◇ Band Selection

### CIRCUIT PROTECTIONS

- ◇ Infinite VSWR
- ◇ Thermal Overload
- ◇ Over Current
- ◇ Over Voltage