



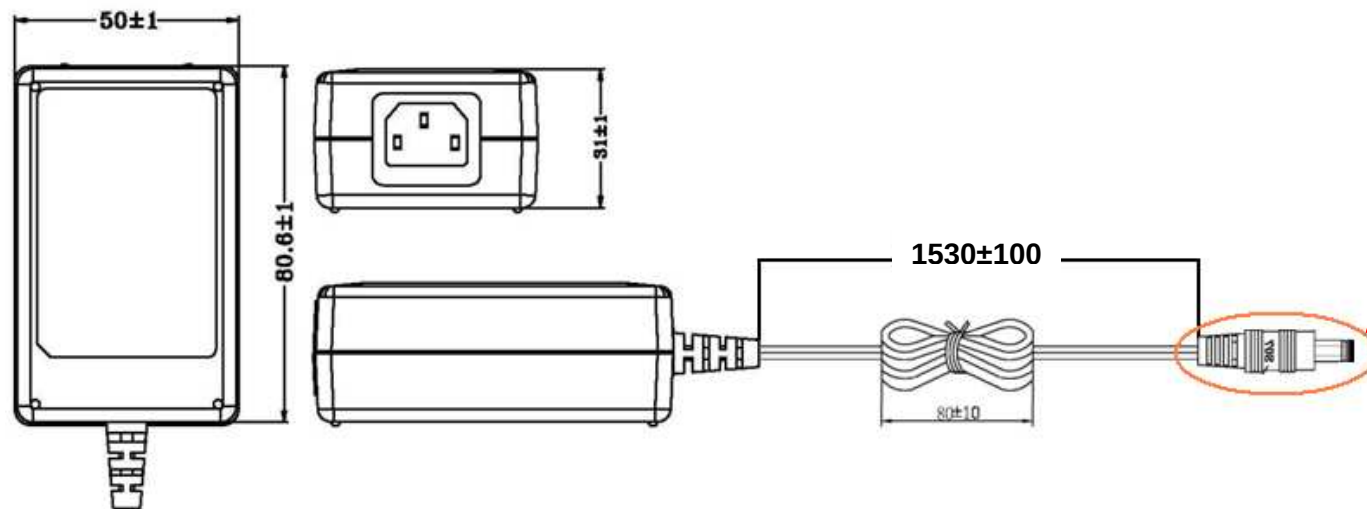

Output Plug
and Polarity are
Dependent on
Customer
Requirements

Inner Box Dimensions

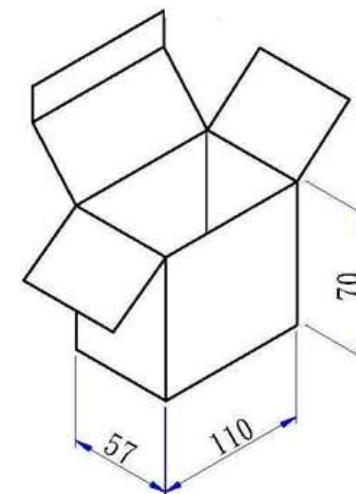

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +5VDC/0~3000mA Regulated, 3 PIN IEC-C14 Socket
- DC Cord: 5FT, 18AWG $\pm 5\%$ (4.75-5.25VDC)
- Operating/Storage Temperature: 0°C ~+50°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.4lbs
- Carton Quantity: 80 pcs

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-5V0-3A0-IDG30	PART TITLE	Energy Efficient 5VDC/ 3A Universal Input Power Supply
PART NUMBER	SA-053A0IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.28.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		