


Output Plug and Polarity are Dependent on Customer Requirements


General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +6VDC/0~1750mA Regulated
- DC Cord: 6FT, 22AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+70°C
- Operating/Storage Humidity: 10%~95%RH/10%~95%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ TUV/ RCM/ CCC/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .30 Lbs
- Carton Quantity: 100 Pcs
- Build to Order

Inner Box Dimensions

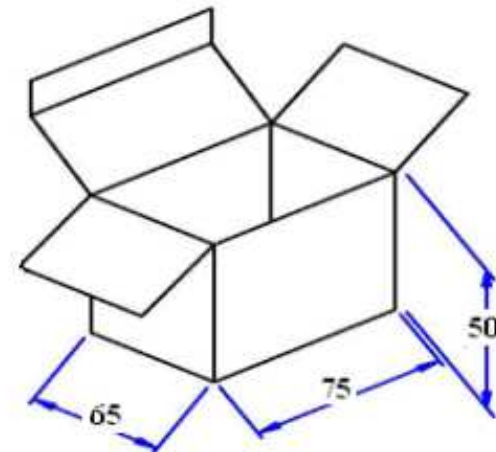

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-6V0-1A75-I2-30	PART TITLE	Energy Efficient 6VDC/ 1.75A Universal Input Power Supply
PART NUMBER	SA-061A75IV-2W	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	01.06.2014		
APPROVAL	CB		
UNIT	mm		
REV	∅		