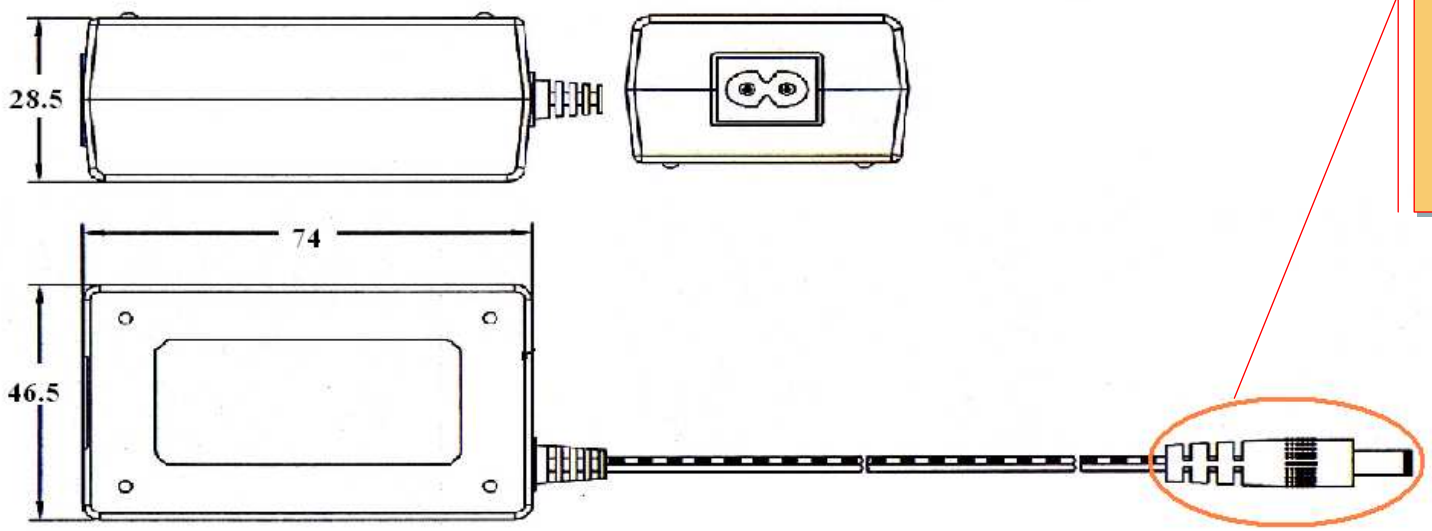

Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- **Input: 100~240Vac/ 47~63Hz**
- **Output: +10VDC/0~1150mA Regulated**
- **DC Cord: 6FT, 22AWG**
- **Operating/Storage Temperature: 0ºC ~+40ºC/ -20ºC~+70ºC**
- **Operating/Storage Humidity: 10%~95%RH/10%~95%RH**
- **M.T.B.F.: 50,000 Hrs. Minimum (25℃ Ambient Temp., Full Load)**
- **Approvals: UL/ CUL/ PSE/ CCC/ TUV/ RCM/ CE/ WEEE/ ROHS/ V**
- **Meets Energy Efficiency Level V Standards**
- **Protection: Over Voltage/Short Circuit**
- **Packaged Unit Weight: .30 Lbs**
- **Carton Quantity: 100 pcs**
- **Build to Order**

Inner Box Dimensions

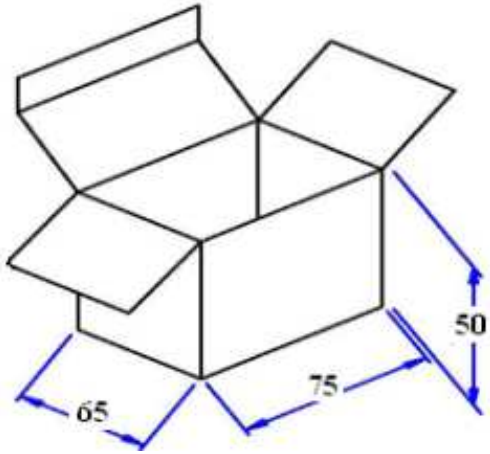

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-10V0-1A15-I2-30	PART TITLE	Energy Efficient 10VDC/ 1.15A Universal Input Power Supply
PART NUMBER	SA-101A15I-2W		
DATE	01.06.2014		
APPROVAL	CB		
UNIT	mm		
REV	ø		

CONDOR ELECTRONICS, INC.
T: 408-745-7141 F: 408-745-0439
780 Montague Expy. Ste. 406
San Jose, CA 95131 USA
sales@condorelectronics.net

©2014 Condor Electronics, Inc.