


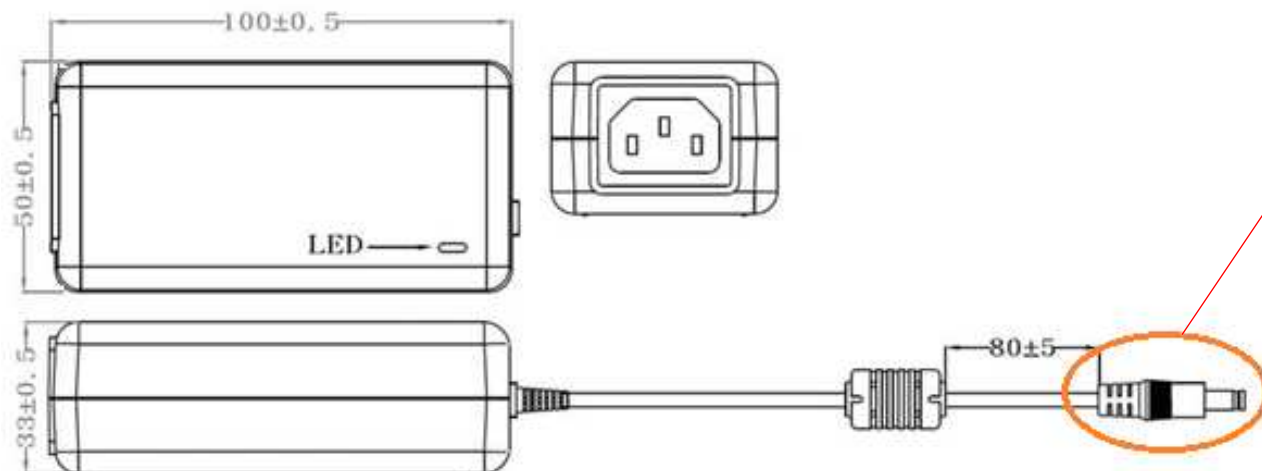


Output Plug
and Polarity are
Dependent on
Customer
Requirements

General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +12VDC/0~2500mA Regulated
- Inlet: IEC-320-C13, 10A/250VAC
- DC Cord: 4.9FT, 16AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 300,000 Hrs. Minimum (25°C By MIL-HDBK-217F)
- Approvals: C-RU®-US/FCC/TUV/CE/WEEE/ROHS/V
- Meets RoHS, Energy Efficiency, and Medical Grade Standards
- Protection: Over Voltage/Short Circuit/Over Current
- Packaged Unit Weight: 0.46 lbs

Inner Box Dimensions

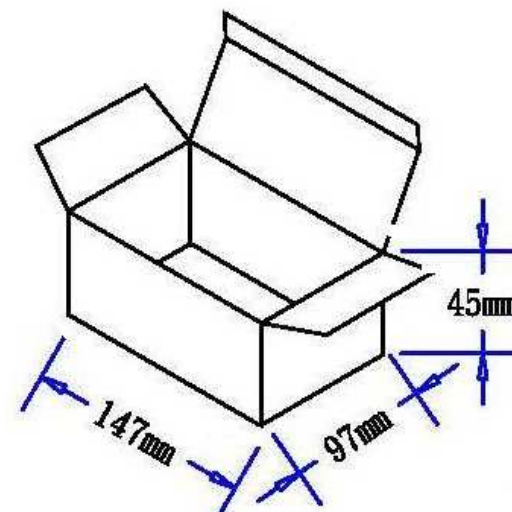

REV	DESCRIPTION	DATE	BY
A			

ITEM NUMBER	SM-12V0-2A5-IDG30	PART TITLE	Energy Efficient Medical Grade 12VDC/ 2.5A Universal Input Power Supply
PART NUMBER	SMA-122A5I V	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	01.08.2014		
APPROVAL	CB		
UNIT	mm		