


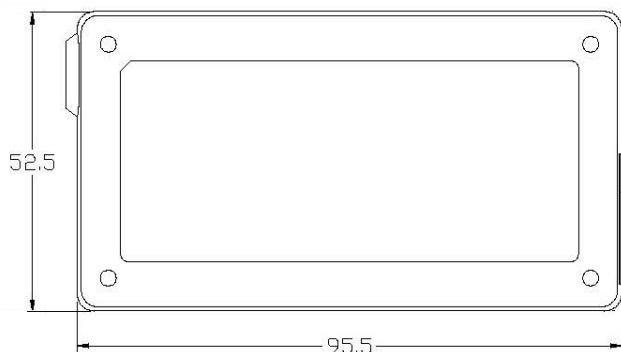


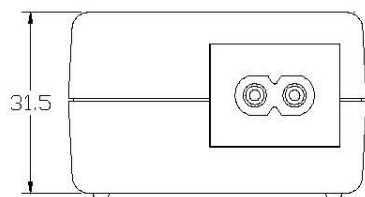

Output Plug and Polarity are Dependent on Customer Requirements



White Inner Box Dimensions

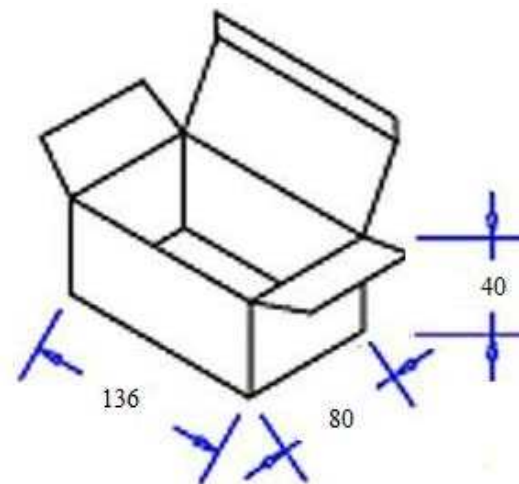

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +12VDC/0~3300mA Regulated
- DC Cord: 5 FT, 18 AWG, With Ferrite
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ BSMI/ RCM/ KOREA/ CCC/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.70 lbs
- Carton Quantity: 60 pcs

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-12V0-3A3-I2-30	PART TITLE	Energy Efficient 12 VDC /3.3A Universal Input Power Supply
PART NUMBER	SA-123A3IV-2W	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	12.10.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		