


Output Plug and Polarity are Dependent on Customer Requirements


General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +15VDC/0~3340mA Regulated
- DC Cord: 5FT, 18AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .48 lbs
- Carton Quantity: 45 pcs

White Inner Box Dimensions

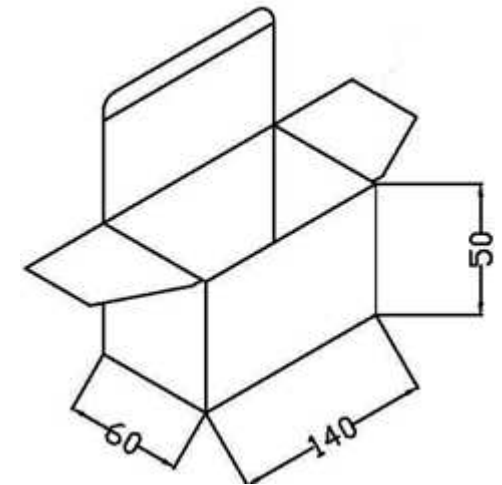

REV	DESCRIPTION	DATE	BY
A			

ITEM NUMBER	S-15V0-3A3-IDG30	PART TITLE	Energy Efficient 5VDC/ 3.34A Universal Input Power Supply
PART NUMBER	SA-153A3IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	11.15.2013		
APPROVAL	CB		
UNIT	mm		