


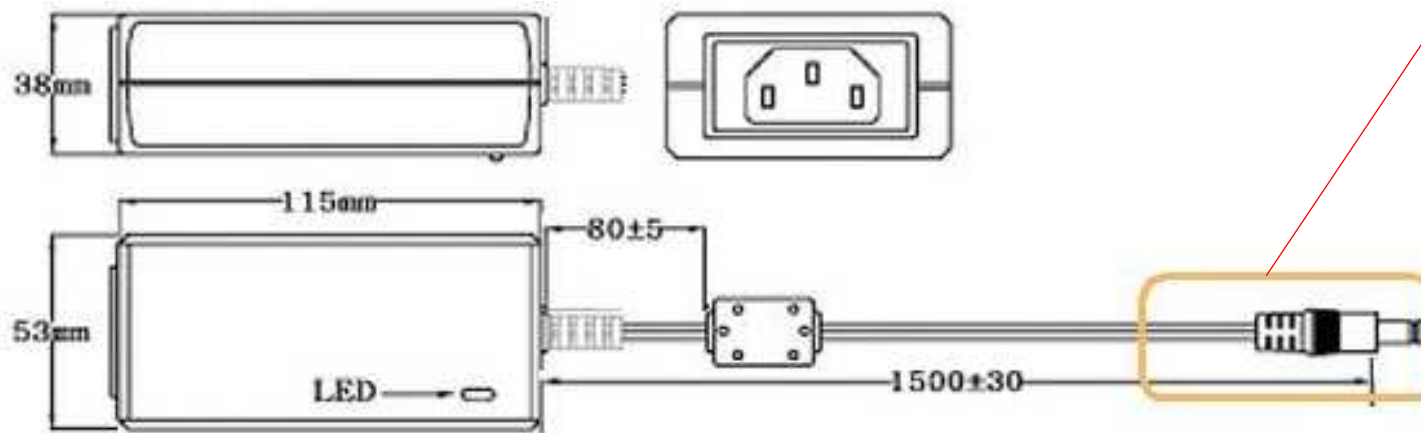


Output Plug
and Polarity are
Dependent on
Customer
Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +15VDC/0~4300mA Regulated
- DC Cord: 5FT, 18AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+60°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ BSMI/ CCC/ RCM/ I RAM/ GOST-R/ SERBI A/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards/ ErP Stage 2
- Protection: Over Voltage/Short Circuit/Over Current
- Packaged Unit Weight: .70 lbs
- Box Quantity: 40 pcs

White Inner Box Dimensions

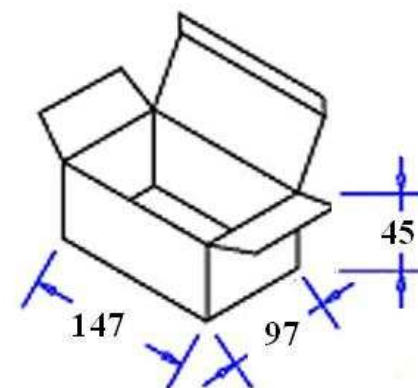

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-15V0-4A3-IDG30	PART TITLE	Energy Efficient 15VDC/ 4.3A Universal Input Power Supply
PART NUMBER	SA-154A3IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.16.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		