


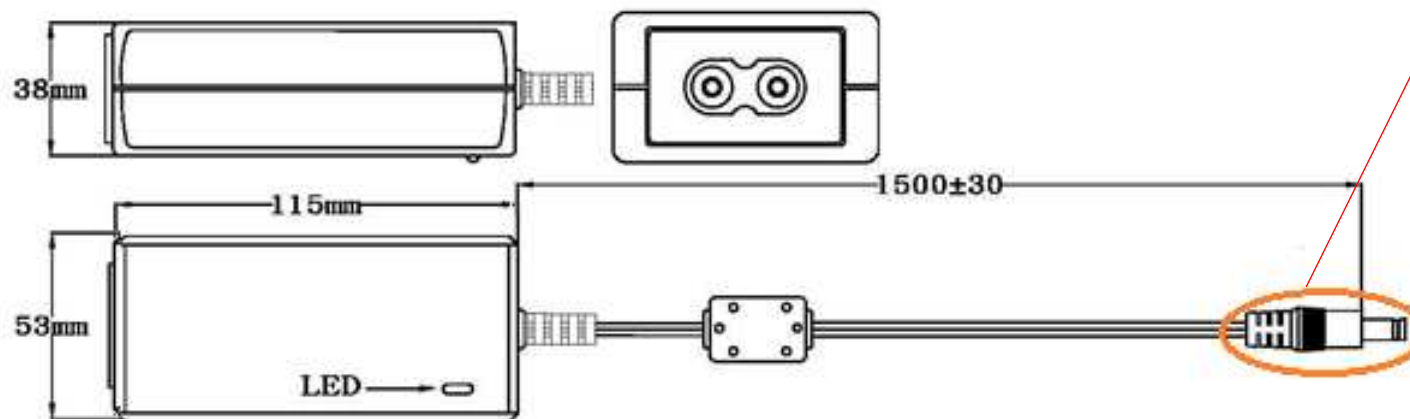


Output Plug
and Polarity are
Dependent on
Customer
Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +15VDC/0~4300mA Regulated
- DC Cord: 5 FT, 18 AWG, With Ferrite
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ BSMI / CCC/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.70 lbs
- Carton Quantity: 40 pcs

White Inner Box Dimensions

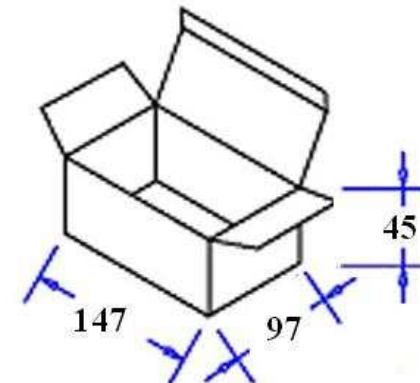

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-15V0-4A3-I2-30	PART TITLE	Energy Efficient 15 VDC /4.3A Universal Input Power Supply
PART NUMBER	SA-154A3IV-2W	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.16.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		