



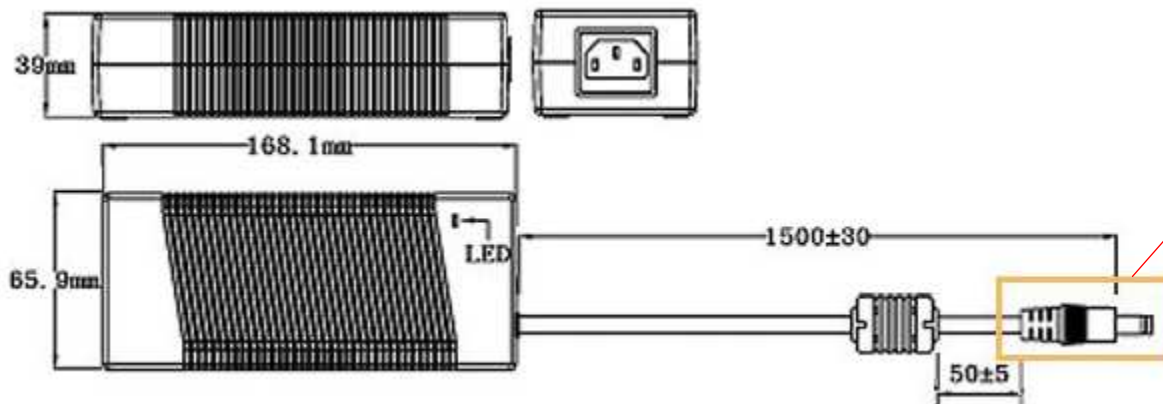

Output Plug
and Polarity are
Dependent on
Customer
Requirements

White Inner Box Dimensions

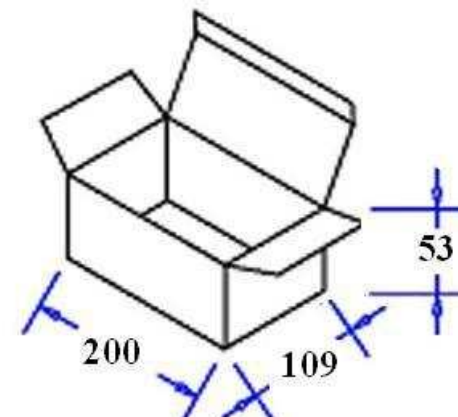

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +19VDC/0~6300mA Regulated
- DC Cord: 5FT, 14AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+60°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/ CUL/ FCC / PSE/ BSMI / CCC/ RCM/ TUV/ CE / WEEE / ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit/Over Current/Over Temperature
- Packaged Unit Weight: 1.45 lbs
- Box Quantity: 24 pcs

REV	DESCRIPTION	DATE	BY
A	Updated Approvals	8/12	EB
B			

ITEM NUMBER	S-19V0-6A3-IDG30	PART TITLE	Energy Efficient 19VDC/ 6.3A Universal Input Power Supply
PART NUMBER	SA-196A3IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.28.10		
APPROVAL	EB		
UNIT	mm		
REV	Ø		