



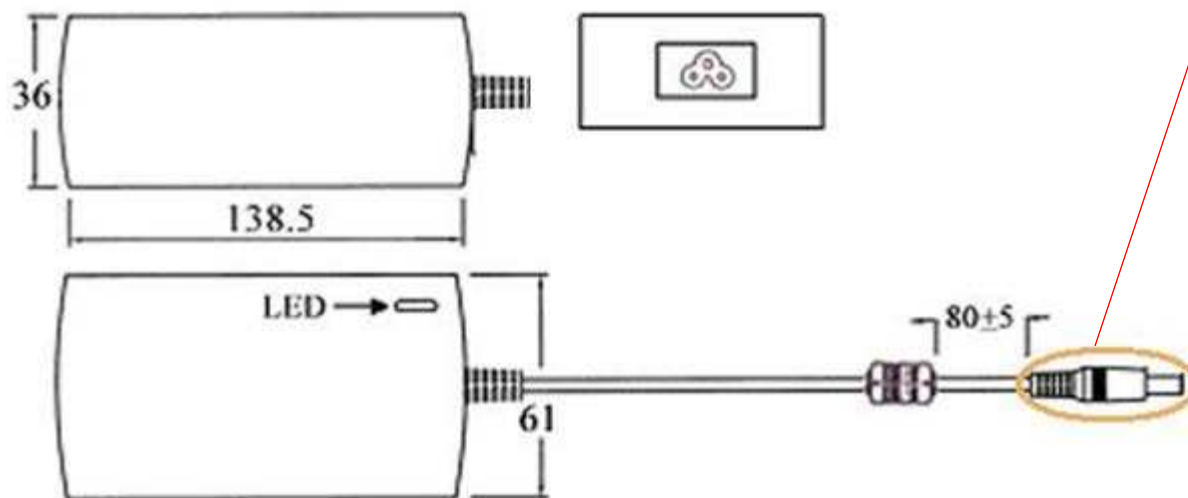

Output Plug
and Polarity are
Dependent on
Customer
Requirements

White Inner Box Dimensions

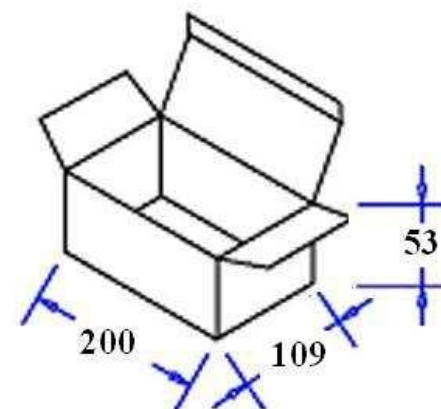

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +20VDC/0~4500mA Regulated
- DC Cord: 4FT, 18AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+60°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/ CUL/ FCC/ PSE/ BSMI/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit/Over Current
- Packaged Unit Weight: .98 lbs
- Box Quantity: 24 pcs

REV	DESCRIPTION	DATE	BY
A	Updated Level IV to V	8/12	EB
B			

ITEM NUMBER	S-20V0-4A5-I3DG30	PART TITLE	Energy Efficient 20VDC/ 4.5A Universal Input Power Supply
PART NUMBER	SA-204A5IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	01.31.12		
APPROVAL	EB		
UNIT	mm		
REV	Ø		