



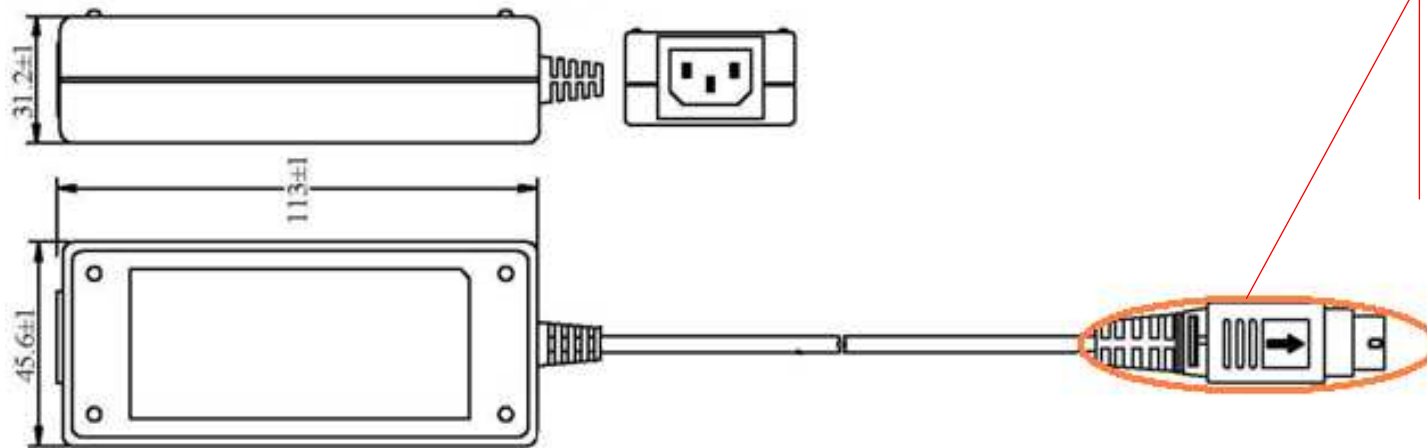

**Output Plug
and Polarity are
Dependent on
Customer
Requirements**

White Inner Box Dimensions

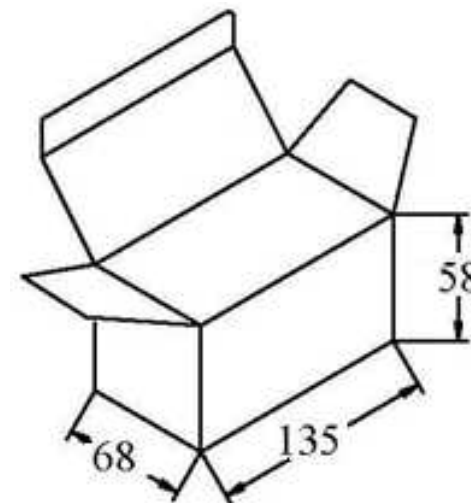

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +24VDC/0~1250mA Regulated
- Floating Ground - Ground Not Tied To Negative Line.
- DC Cord: 6FT, 22AWG, Round
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+70°C
- Operating/Storage Humidity: 10%~95%RH/10%~95%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ CCC/ KOREA/ RCM/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.50 lbs
- Carton Quantity: 75 pcs

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-24V0-1A25-IDFG30	PART TITLE	Energy Efficient 24VDC/ 1.25A Universal Input Power Supply with Floating Ground.
PART NUMBER	SA-241A25IVG	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	12.19.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		