



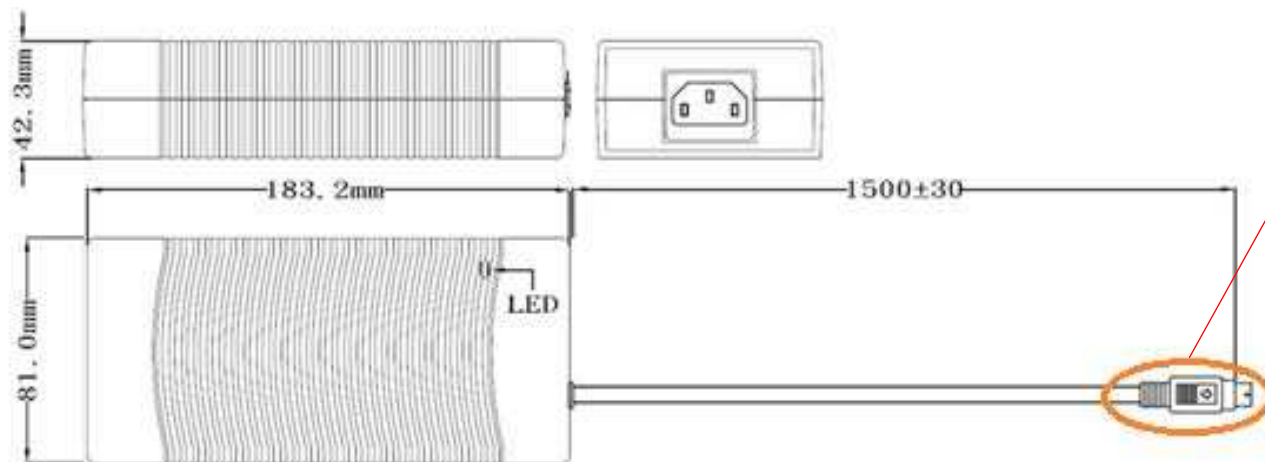

Output Plug
and Polarity are
Dependent on
Customer
Requirements

White Inner Box Dimensions

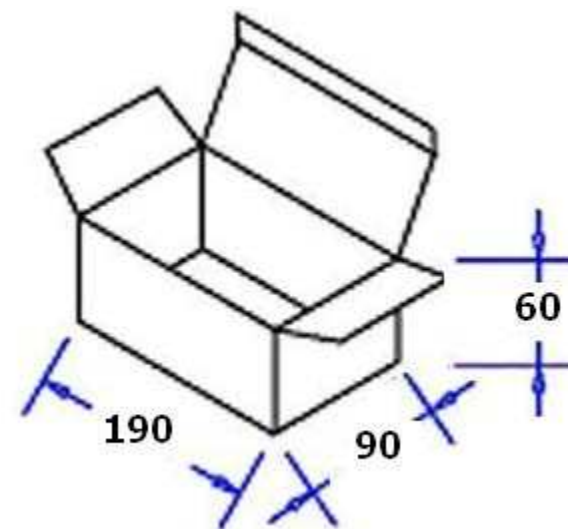

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +24VDC/0~8300mA Regulated
- DC Cord: 5FT, 16AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+60°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 50,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/CUL/FCC/PSE/BSMI/TUV/CE/WEEE/ROHS/V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit/Over Current/Over Temperature
- Packaged Unit Weight: 1.82 lbs

REV	DESCRIPTION	DATE	BY
A			

ITEM NUMBER	S-24V0-8A3-IDG30	PART TITLE	Energy Efficient 24VDC/ 8.3A Universal Input Power Supply
PART NUMBER	SA-248A3IV	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.21.2013		
APPROVAL	CB		
UNIT	mm		