


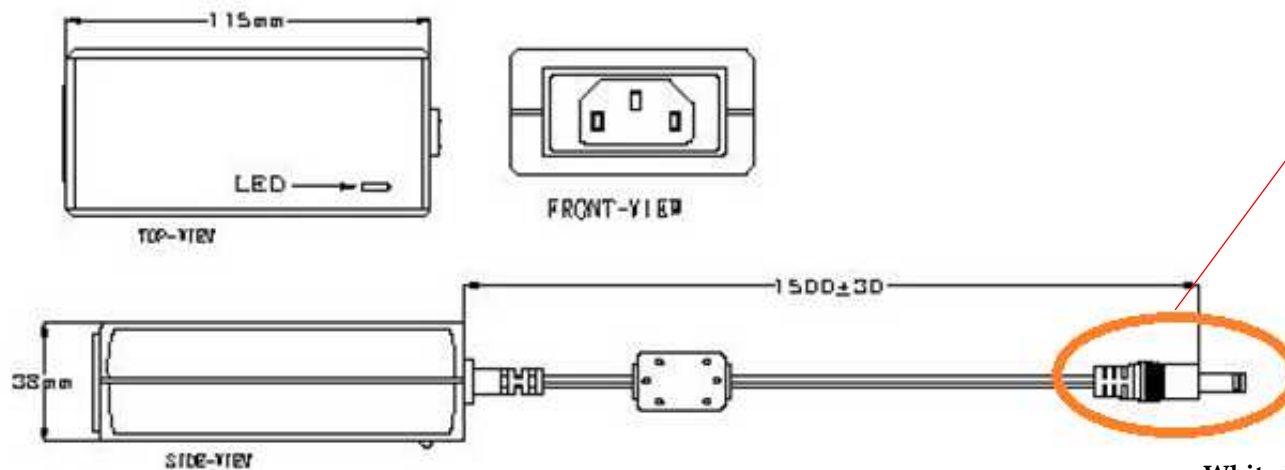


Output Plug
and Polarity are
Dependent on
Customer
Requirements

White Inner Box Dimensions

General Specifications

- Input: 100~240Vac/ 50~60Hz
- Output: +48VDC/0~1360mA Regulated
- DC Cord: 4.9FT, 20AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 20%~80%RH/10%~90%RH
- M.T.B.F.: 300,000 Hrs. Minimum (25°C Ambient Temp., Full Load)
- Approvals: UL/CUL/FCC/LPS/PSE/RCM/BSMI/CCC/TUV/CE/WEEE/ROHS/V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit/Over Current/Over Temperature
- Packaged Unit Weight: .70 lbs.

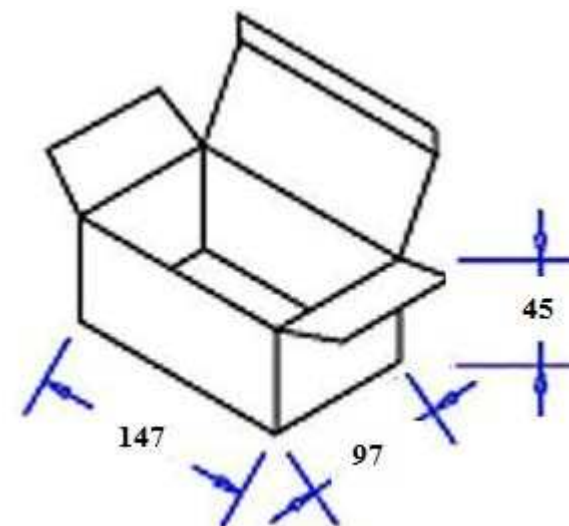

REV	DESCRIPTION	DATE	BY
A			

ITEM NUMBER	S-48V0-1A36-IDG30	PART TITLE	Energy Efficient 48VDC/ 1.36A Universal Input Power Supply
PART NUMBER	SA-481A361V	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	11.01.2013		
APPROVAL	CB		
UNIT	mm		