


Output Plug  
and Polarity are  
Dependent on  
Customer  
Requirements


### General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +3.3VDC/0~1800mA Regulated
- DC Cord: 1.6FT (500mm), 20AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.15 lbs
- Carton Quantity: 140
- Interchangeable Input Plugs Sold As A Set  
Or Individually (Country Specific)

Inner Box Dimensions:

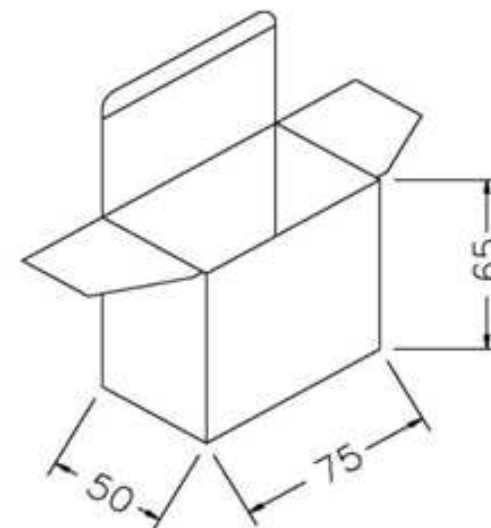

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-3V3-1A8-U30	PART TITLE	Energy Efficient 3.3VDC/ 1.8A Universal Input Power Supply
PART NUMBER	SA-0331A8P	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	10.23.2013		
APPROVAL	CB		
UNIT	mm		
REV	Ø		