


## General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +5VDC/0~2000mA Regulated
- DC Cord: 6 FT, 20AWG with MICRO B Plug
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+70°C
- Operating/Storage Humidity: 10%~95%RH/ 10%~95%RH
- Approvals: UL/ CUL/ FCC/ LPS/ C-TICK/ TUV-GS, BS/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.48 lbs (Complete Set)
- Carton Quantity: 60 pcs (COMPLETE INTL SET)
- Can Be Used As Desktop Supply When All Interchangeable are Removed (See IEC-320-C8 Inlet)
- Interchangeable Input Plugs Sold As A Set or Individually (Country Specific)

Inner Box Dimensions:

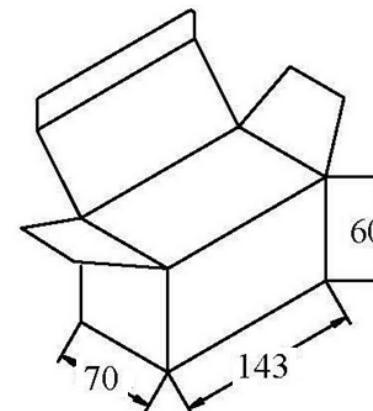

FOR COMPLETE  
INTERNATIONAL SET

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-5V0-2A0-U30-USB	PART TITLE	Convertible Wall Plug-In 5VDC/2A USB Power Supply
PART NUMBER	SA-052A0P-MICB	 <b>CONDOR ELECTRONICS, INC.</b> T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA <a href="mailto:sales@condorelectronics.net">sales@condorelectronics.net</a>	
DATE	03.03.2014		
APPROVAL	CB		
UNIT	mm		
REV	Ø		