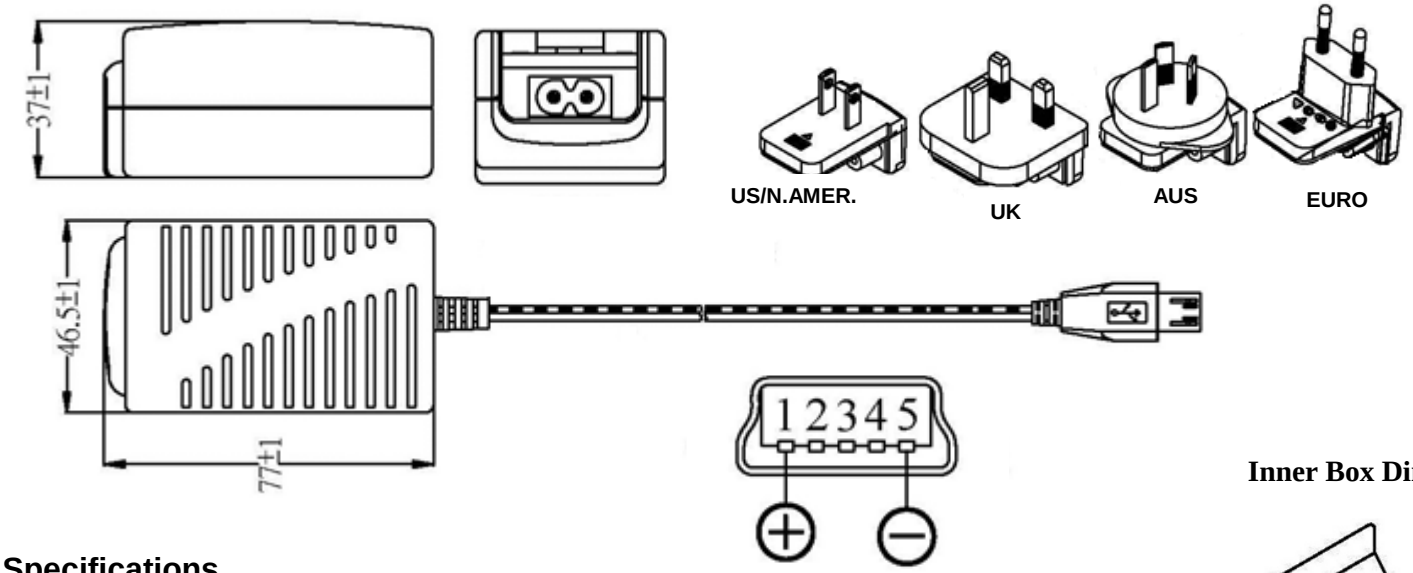

General Specifications

- **Input: 100~240Vac/ 47~63Hz**
- **Output: +5VDC/0~2000mA Regulated**
- **DC Cord: 6 FT, 20AWG with MINI B Plug**
- **Operating/Storage Temperature: 0ºC ~+40ºC/ -20ºC~+70ºC**
- **Operating/Storage Humidity: 10%~95%RH/ 10%~95%RH**
- **Approvals: UL/ CUL/ FCC/ LPS/ C-TICK/ TUV-GS, BS/ CE/ WEEE/ ROHS/ V**
- **Meets Energy Efficiency Level V Standards**
- **Protection: Over Voltage/Short Circuit**
- **Packaged Unit Weight: 0.48 lbs (Complete Set)**
- **Carton Quantity: 60 pcs (COMPLETE INTL SET)**
- **Can Be Used As Desktop Supply When All Interchangeable are Removed (See IEC-320-C8 Inlet)**
- **Interchangeable Input Plugs Sold As A Set or Individually (Country Specific)**

Inner Box Dimensions:

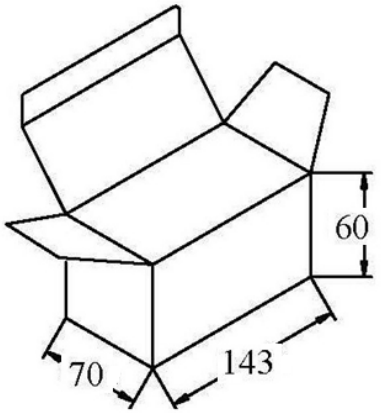

FOR COMPLETE INTERNATIONAL SET

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-5V0-2A0-U30-USB
PART NUMBER	SA-052A0P-MINIB
DATE	11.25.13
APPROVAL	CB
UNIT	mm
REV	ø

PART TITLE: Convertible Wall Plug-In 5VDC/2A USB Power Supply

CONDOR ELECTRONICS, INC.
T: 408-745-7141 F: 408-745-0439
780 Montague Expy. Ste. 406
San Jose, CA 95131 USA
sales@condorelectronics.net

©2013 Condor Electronics, Inc.