


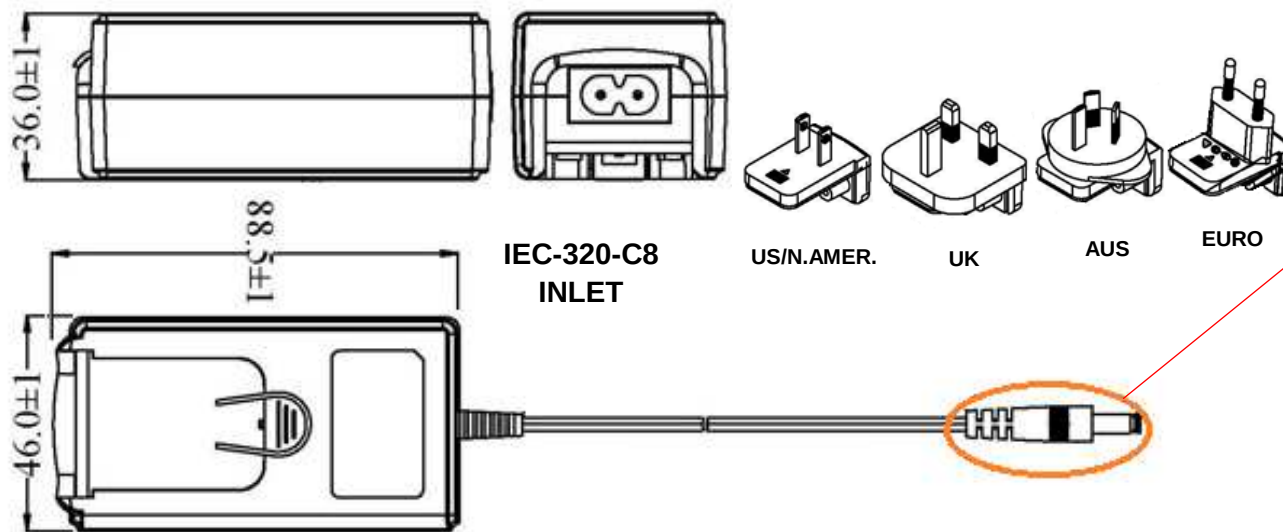


Output Plug
and Polarity are
Dependent on
Customer
Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +7.5VDC/0~3000mA Regulated
- DC Cord: 6 FT, 18 AWG
- Operating/Storage Temperature: $0^{\circ}\text{C} \sim +40^{\circ}\text{C}$ / $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Operating/Storage Humidity: 10%~95%RH/ 10%~95%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ C-TICK/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: 0.6 lbs
- Carton Quantity: 60 pcs
- Can Be Used As Desktop Supply When All Interchangeables are Removed (See IEC-320-C8 Inlet)
- Interchangeable Input Plugs Sold As A Set or Individually (Country Specific)
- Build to Order

Inner Box Dimensions:

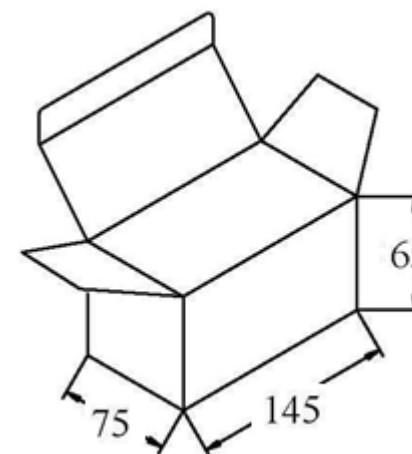

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-7V5-3A0-U30	PART TITLE	Energy Efficient 7.5VDC/3A Universal Input Power Supply
PART NUMBER	SA-073A0P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	01.06.2014		
APPROVAL	CB		
UNIT	mm		
REV	Ø		