


Output Plug and Polarity are Dependent on Customer Requirements

Inner Box Dimensions:

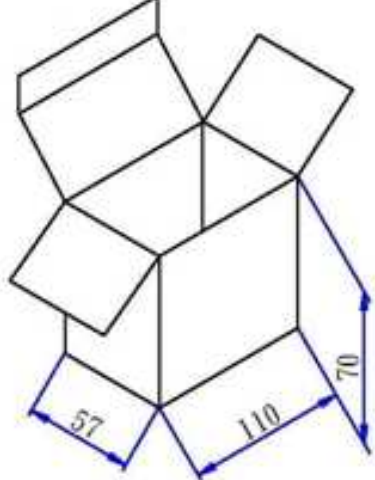

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +12VDC/0~500mA Regulated
- DC Cord: 5FT, 22AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ BSMI/ RCM/ TUV/ CE/ WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .20 Lbs
- Carton Quantity: 100 Pcs
- Interchangeable Input Plugs Sold As A Set Or Individually (Country Specific)

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-12V0-0A5-U30
PART NUMBER	SA-120A5P
DATE	11.08.2013
APPROVAL	CB
UNIT	mm
REV	∅

PART TITLE	Energy Efficient 12VDC/0.5A Power Supply
------------	--



CONDOR ELECTRONICS, INC.
 T: 408-745-7141 F: 408-745-0439
 780 Montague Expy. Ste. 406
 San Jose, CA 95131 USA
sales@condorelectronics.net