


Output Plug and Polarity are Dependent on Customer Requirements

General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +12VDC/0~1600mA Regulated
- DC Cord: 5 FT, 20 AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+80°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/ CUL/ FCC/ LPS/ PSE/ BSMI / WEEE/ ROHS/ V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .42 lbs
- Carton Quantity: 100 pcs

Inner Box Dimensions:

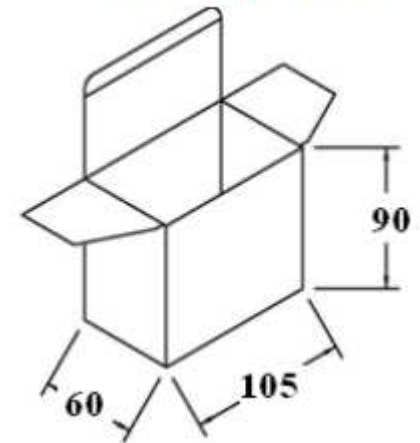

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-12V0-1A6-UV30
PART NUMBER	SA-121A6V
DATE	10.30.2013
APPROVAL	CB
UNIT	mm
REV	∅

PART TITLE	Energy Efficient Vertical Blade 12VDC/ 1.6A Universal Input Power Supply
-------------------	--



CONDOR ELECTRONICS, INC.
 T: 408-745-7141 F: 408-745-0439
 780 Montague Expy. Ste. 406
 San Jose, CA 95131 USA
sales@condorelectronics.net