


Output Plug
and Polarity are
Dependent on
Customer
Requirements


General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +12VDC/0~3000mA Regulated
- DC Cord: 5FT, 18AWG
- Operating/Storage Temperature: 0°C ~+40°C/ -10°C~+70°C
- Operating/Storage Humidity: 20%~80%RH/ 10%~90%RH
- Approvals: UL/CUL/FCC/LPS/PSE/RCM/TUV/CE/WEEE/ROHS/V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .76 Lbs
- Carton Quantity: 40 Pcs
- Interchangeable Input Plugs Available As A Set
Or Sold Individually (Country Specific).

Inner Box Dimensions:

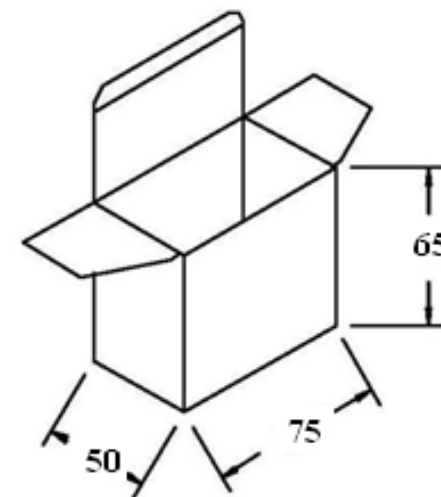

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-12V0-3A0-U30	PART TITLE	Energy Efficient 12VDC/ 3A Universal Input Power Supply
PART NUMBER	SA-123A0P	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	11.13.13		
APPROVAL	CB		
UNIT	mm		
REV	Ø		