


**Output Plug
and Polarity are
Dependent on
Customer
Requirements**


General Specifications

- Input: 100~240Vac/ 47~63Hz
- Output: +15VDC/0~1200mA Regulated
- Floating Ground
- DC Cord: 6 FT MIN., 20AWG, Round
- Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+70°C
- Operating/Storage Humidity: 10%~95%RH/ 10%~95%RH
- Approvals: UL/CUL/FCC/WEEE/ROHS/V
- Meets Energy Efficiency Level V Standards
- Protection: Over Voltage/Short Circuit
- Packaged Unit Weight: .42 lbs
- Carton Quantity: 100 pcs
- Build to Order

Inner Box Dimensions:

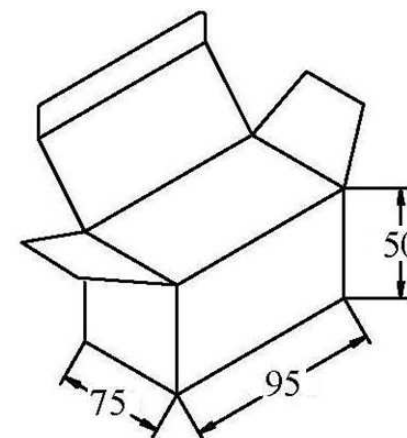

REV	DESCRIPTION	DATE	BY
A			
B			

ITEM NUMBER	S-15V0-1A2-UG30	PART TITLE	Universal Input Energy Efficient 15VDC/1.2A Power Supply with Floating Ground
PART NUMBER	SA-151A2G	 CONDOR ELECTRONICS, INC. T: 408-745-7141 F: 408-745-0439 780 Montague Expy. Ste. 406 San Jose, CA 95131 USA sales@condorelectronics.net	
DATE	01.02.2014		
APPROVAL	CB		
UNIT	mm		
REV	ø		