


Output Plug and Polarity are Dependent on Customer Requirements

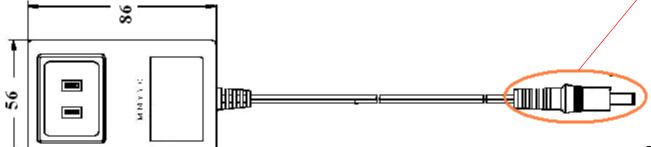

General Specifications

Input: 100~240Vac/ 47~63Hz

Output: +18VDC/0~1600mA Regulated

DC Cord: 6 FT, 18 AWG (Flat) or 12 FT, 16 AWG (Round)

■ Operating/Storage Temperature: 0°C ~+40°C/ -20°C~+70°C

Operating/Storage Humidity: 10%~95%RH/ 10%~95%RH

Approvals: UL/CUL/FCC/LPS/WEEE/ROHS/V

Meets Energy Efficiency Level V Standards


Protection: Over Voltage/Short Circuit

Packaged Unit Weight: 0.55 lbs

Carton Quantity: 60 pcs

Build to Order

REV	DESCRIPTION	DATE	BY
Α			
В			



PART

TITLE

		ı
ITEM NUMBER	S-18V0-1A6-U30	
PART NUMBER	SA-181A6W	
DATE	01.02.2014	
APPROVAL	СВ	
UNIT	mm	
REV	Ø	

Energy Efficient 18VDC/1.6A Universal Input Power Supply

